


NOISE CUT TRANSFORMER

UL 1Ø 단자대형 노이즈 컷 트랜스포머



RoHS

UL 인증

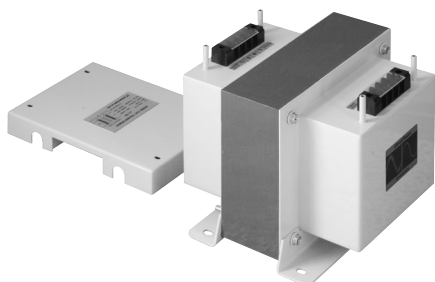

● Specifications

- Input voltage : 200, 208, 220, 230, 240V
- Output voltage : 200, 208, 220, 230, 240V
- Frequency : 50/60 Hz
- Capacity : 0.25kVA ~ 10kVA
- Insulation resistance : Min. 100M Ω , at 500DVC Megger
- Dielectric withstand voltage
 - : Between Primary & Secondary(4.2kVAC for 1min)
 - : Between each terminal & Ground(4.2kVAC for 1min)
- Oper. temperature & humidity : - 5 ~ 40℃ & 0 ~ 90%(Non-Condensing)
- Lifetime(calculated) : 20Years
- UL Cer. No : E349195 • UL : 5085-2 • UL : 1446 • IEC61558

● Terminal Type Specifications

Insulation Class H

MODEL	VA	SPECIFICATIONS		DIMENSIONS (mm)								WEIGHT (kg)
		PRI.(V)	SEC.(V)	W	H	D	a	b	c	ϕ	M	
WYNC22-250TUL	250	①200 ②208 ③220 ④230 ⑤240	①200 ②208 ③220 ④230 ⑤240	143	121	165	122	100	9.5	7 x 10	M3.5	8.0
WYNC22-300TUL	300			143	121	165	122	100	9.5	7 x 10	M3.5	8.5
WYNC22-500TUL	500			173	144	210	140	128	9.5	7 x 10	M3.5	13.5
WYNC22-750TUL	750			201	175	240	170	130	10	8 x 12	M4	20.5
WYNC22-1KTUL	1K			201	175	240	170	130	10	8 x 12	M4	22.5
WYNC22-1.5KTUL	1.5K			239	204	233	207	120	10	8 x 12	M4	29.5
WYNC22-2KTUL	2K			239	204	233	207	120	10	8 x 12	M4	31.5
WYNC22-2.5KTUL	2.5K			239	204	260	207	137	10	8 x 12	M4	38.5
WYNC22-3KTUL	3K			239	204	260	207	137	10	8 x 12	M4	40.5
WYNC22-4KTUL	4K			261	227	315	207	179	13	8 x 12	M6	53.5
WYNC22-5KTUL	5K			261	227	315	207	179	13	8 x 12	M6	56.0
WYNC22-6KTUL	6K			330	272	375	270	194	18	11 x 20	M6	83.5
WYNC22-7.5KTUL	7.5K			330	272	375	270	194	18	11 x 20	M6	90.5
WYNC22-10KTUL	10K			330	272	410	270	229	18	11 x 20	M6	114.0

※1차, 2차 전압은 주문시 선택

전압 선택 적용 예 :

PRI.(V) - 220V / SEC.(V) - 110V

PRI.(V) - 208V / SEC.(V) - 110V

PRI.(V) - 220V / SEC.(V) - 100V




PRI.(V) - 220V / SEC.(V) - 115V

● 제품 주요 용도(Major applications)

- 반도체 제조 장비의 전원 공급용
- 정밀 계측기의 전원 공급용
- 의료기, 철도, 전산센터등의 주전원 공급용
- 교통망 신호 제어등의 전원 Line
- 노이즈 발생이 심한 전원 Line
- MICOM 제어기기, PLC, OA, FA 기기의 전원 공급용

- Supply power to the semiconductor manufacturing equipment.
- Supply power to precision meters
- Supply main power to medical devices, railroads and computer centre
- Power supply line for transportation network signal control.
- Power supply line producing high level of noise.
- Supply power to Micom controls and PLC, OA and FA equipment.

● Dimension

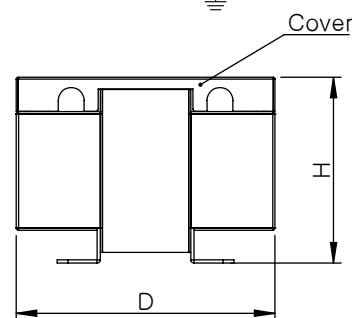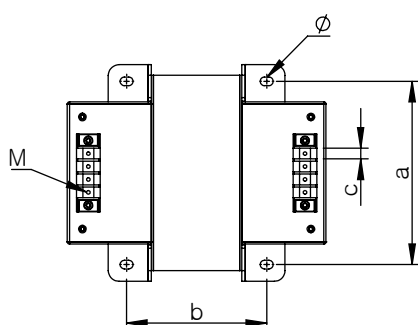

● Connection Diagram

