

THYRISTOR UNIT(TPR)

10 220V, 380/440V

CE RoHS




위상제어 및 사이클 제어가 겸용으로 한 제품에 내장되어있어 현장에서의 설정 및 설치가 쉬우며 AC220V, 380/440V와 25~50A의 부하 전류를 제어할 수 있고 Soft Start 기능이 설정 가능하여 부하의 소손 및 수명에 대한 신뢰를 높였습니다.

This product is internally equipped with both phase control and cycle control to be easily set and installed at a site, can control load currents over 25~50A at AC220V, 380/440V and can set a soft start function to raise trust against load burning and for product lifespan.

CE

● Connection Diagram

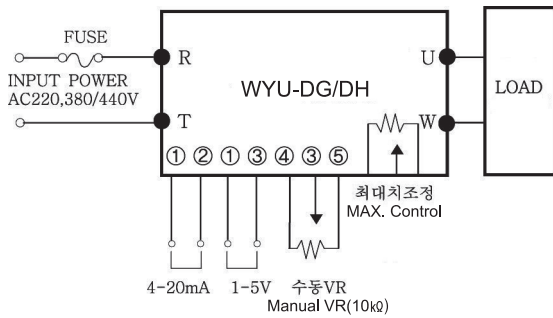

● Specifications

ITEM	MODEL
	WYU-DG25/40/50SI WYU-DH25/40/50SI
Rated voltage	DG : AC 220V(AC 180V~240V), DH : AC 380V/440V(AC 360V~460V)
Frequency	50 / 60Hz
Reated current	25, 40, 50A
Ambient temperature	0 ~ 40°C
Storage temperature	-20 ~ +80°C
Minimum load current	1A
Control input	DC 1~5V
	DC 4~20mA
	VR (10kΩ)
Load control range	0 ~ 100%
Cooling type	Netural cooling
Dielectric withstand	Pri-Sec, Pri-Earth : 2000Vac for 1Minute
	Sec-Earth : 500Vac for 1Minute
Isolation resistance	100MΩ(at 500Vdc mega)
Soft start set	3 ~ 255s (1s Step)
Control error detector	Heat Sink Over temp.
Weight	1.1kg

※ 110V : 주문제작 가능.

● Dimension

