



● Features


- 2 Mounting Option
 - WYF****D : Din Rail Mounting
 - WYF**** : Screw Mounting
- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant
- KC(안전인증) Approved by HH03009-15004A
- Inverter Output Type : Model Type"C" (WYFT05T1C)

● Specifications

ITEM	MODEL	SYMBOL	WYFT05T1A(D) WYFT05T1C(D)	WYFT10T1A(D) WYFT10T1C(D)	WYFT15T1A(D) WYFT15T1C(D)	WYFT20T1A(D) WYFT20T1C(D)	WYFT30T1A(D) WYFT30T1C(D)
Rated Voltage	V		250				
Rated Current	A		5	10	15	20	30
Frequency	Hz		50 / 60				
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)				
Insulation Resistance	MΩ		500				
Leakage Current	mA		≤2.5mA at the 250Vac				
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-2]				
Operating Humidity	RH		35 ~ 85%RH				
Weight	kg		0.5				

※ Derating Curve of page 519




● Circuit Diagram

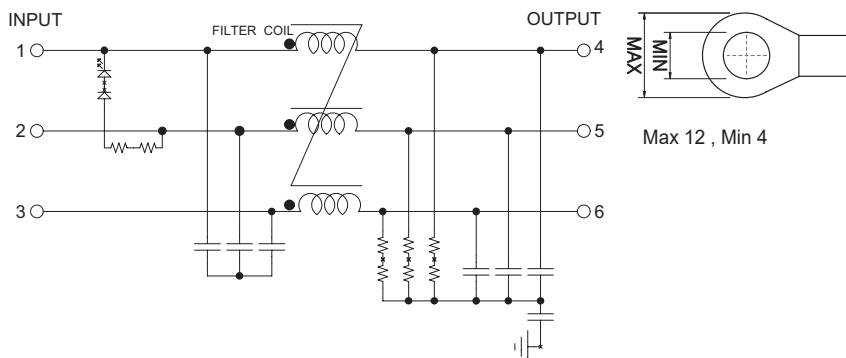









● Terminal

● Characteristics

● Dimension






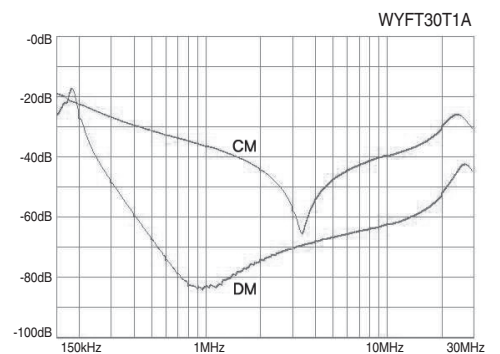
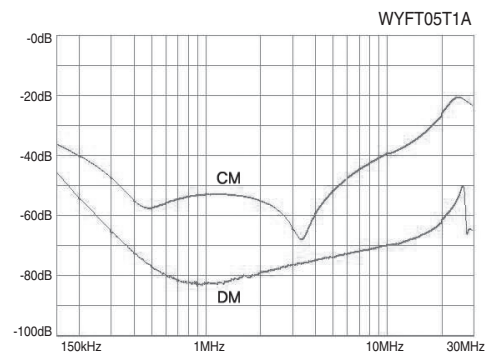
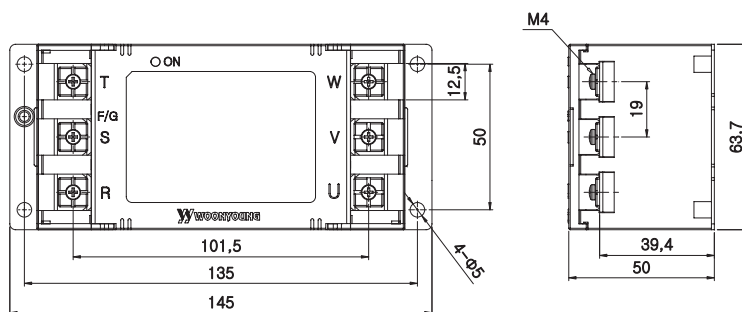


● Characteristics

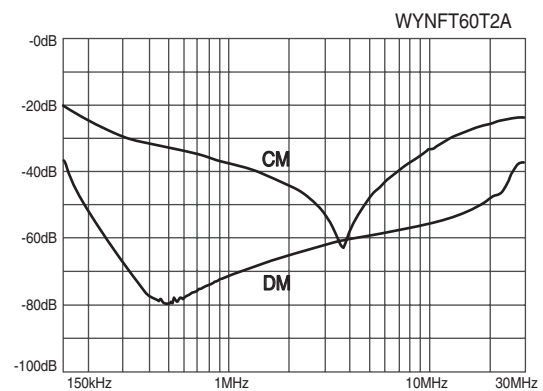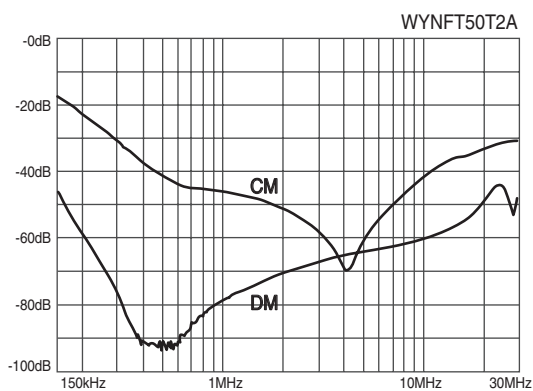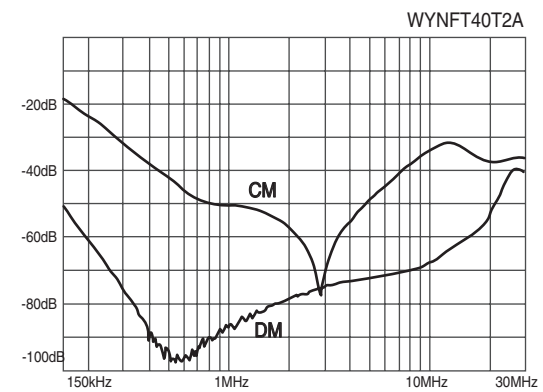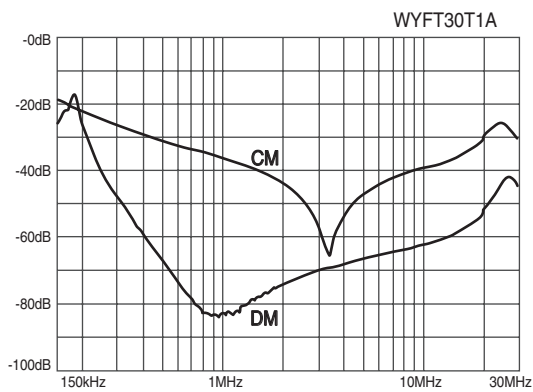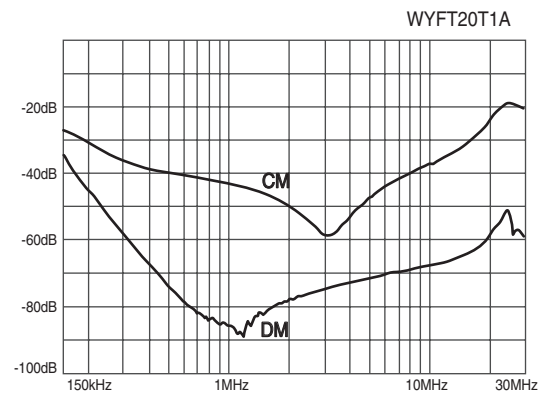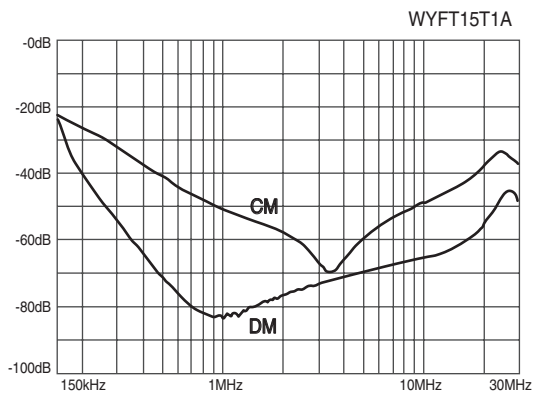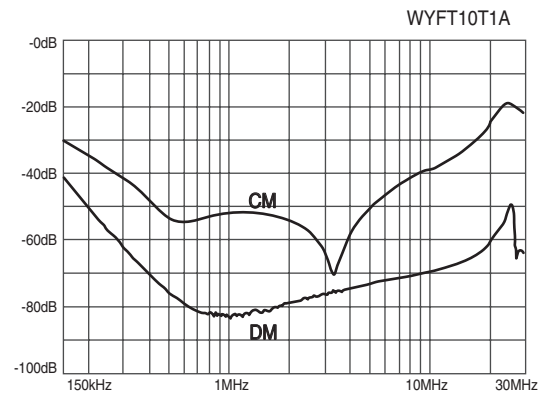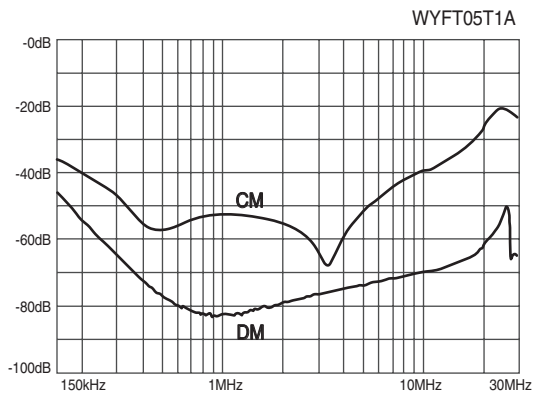









※ CM : Common mode, DM : Differential mode

● Characteristics

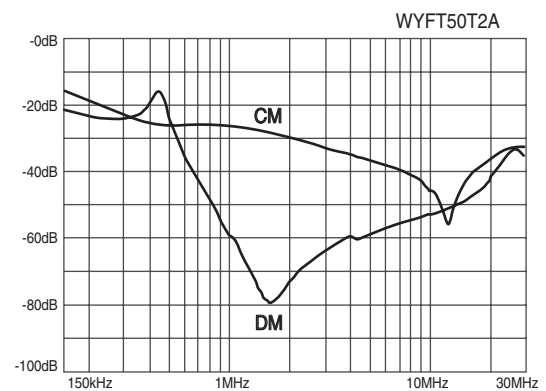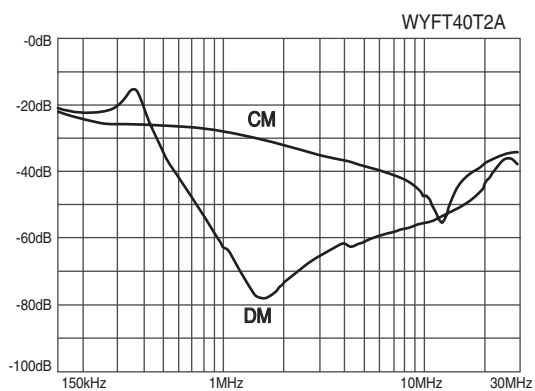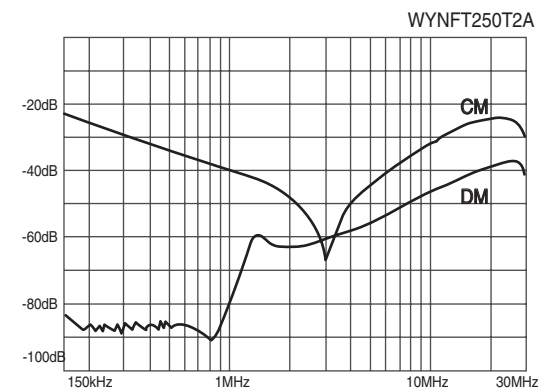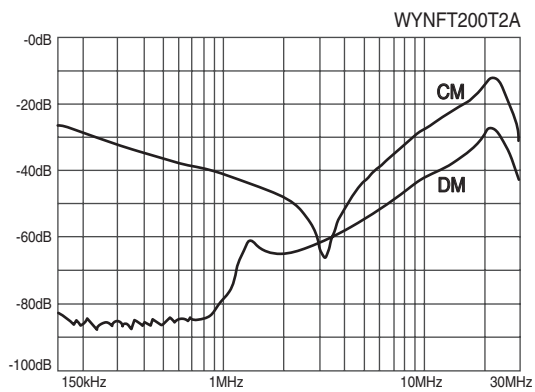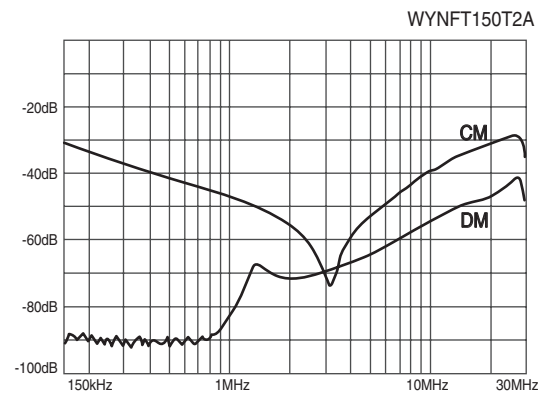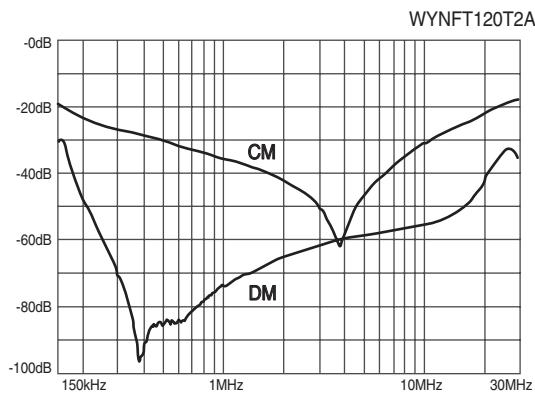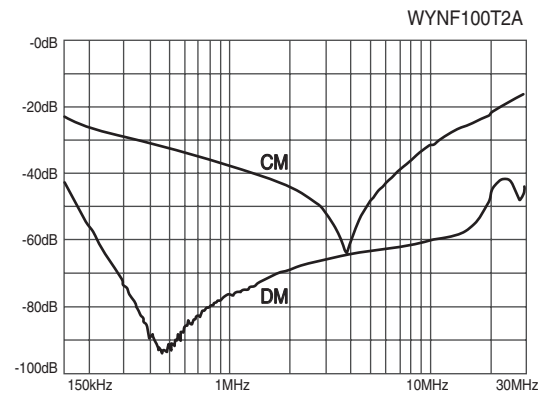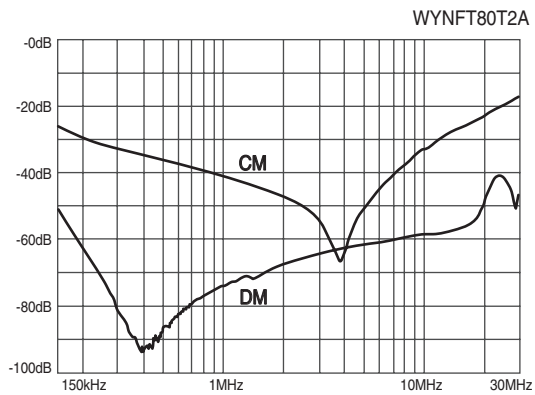









※ CM : Common mode, DM : Differential mode

● Characteristics

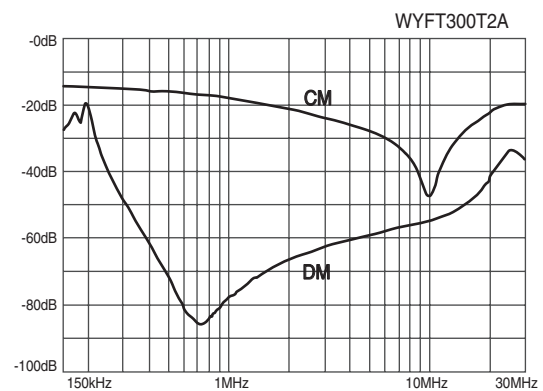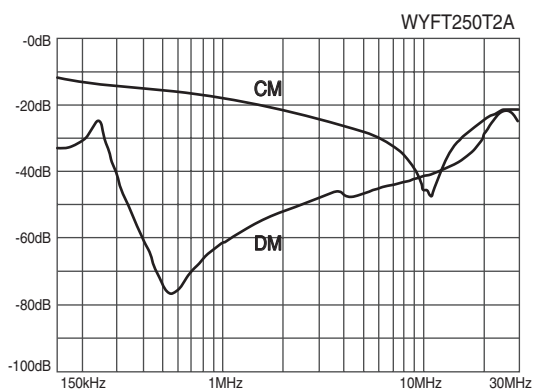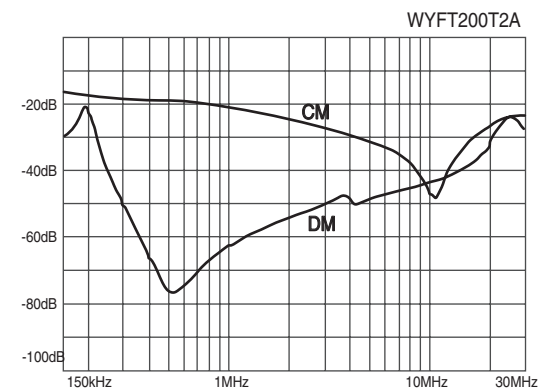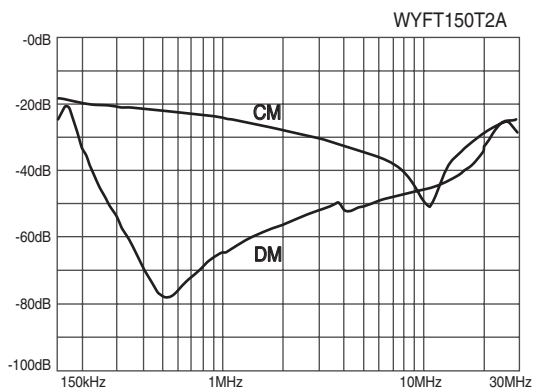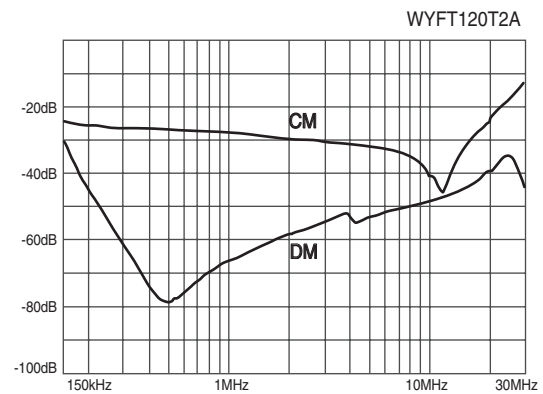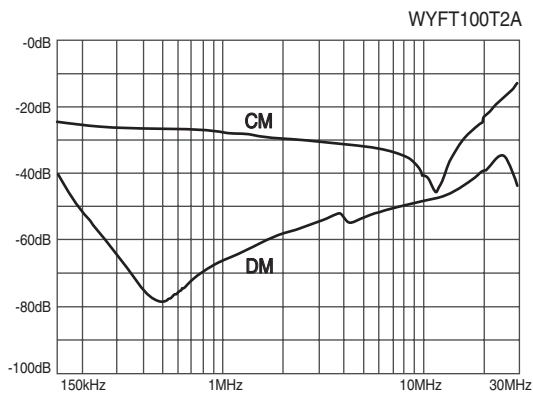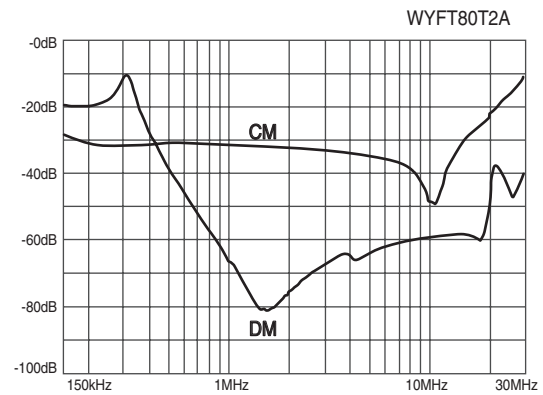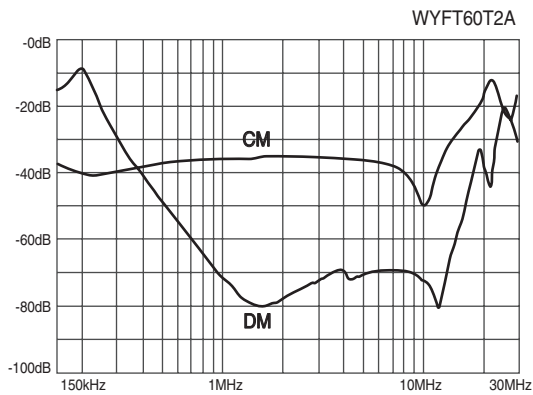

※ CM : Common mode, DM : Differential mode









● Characteristics

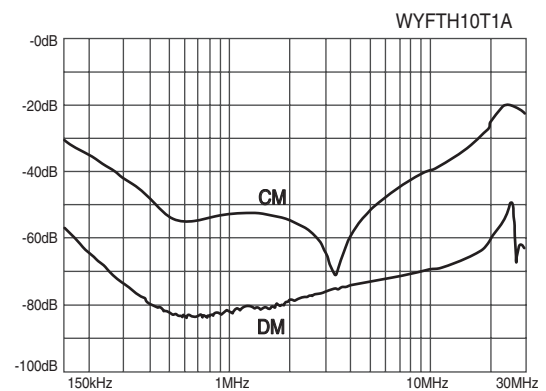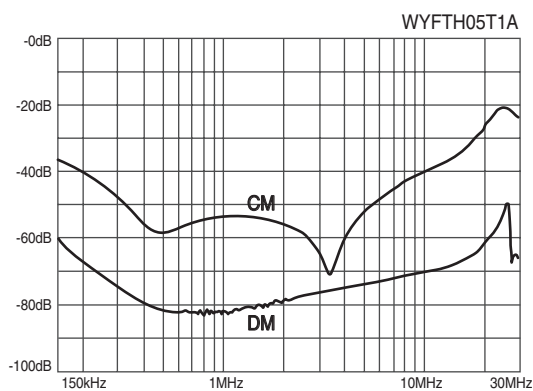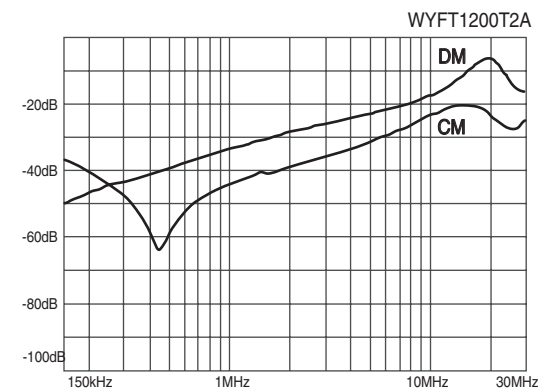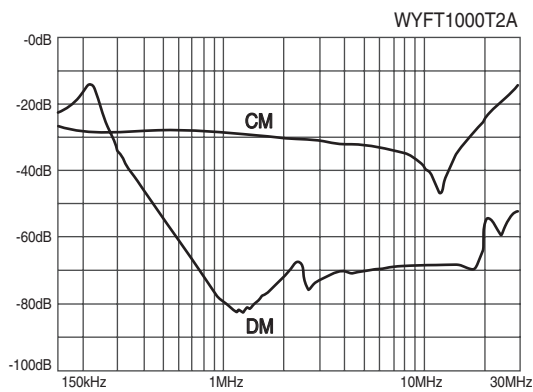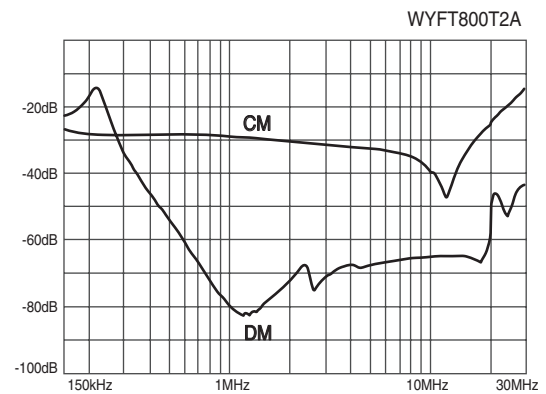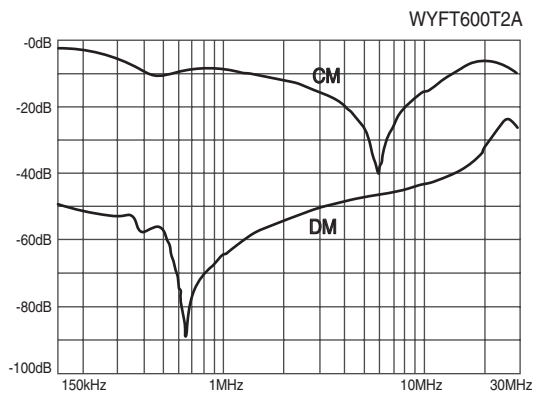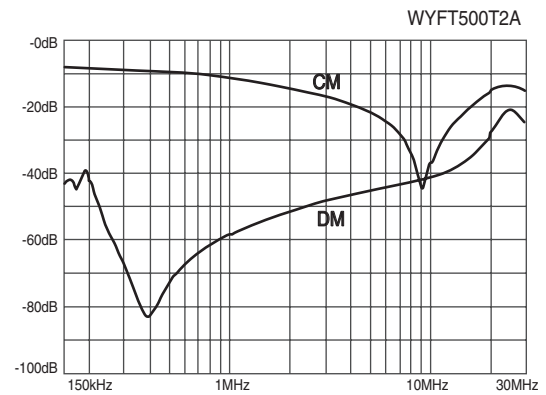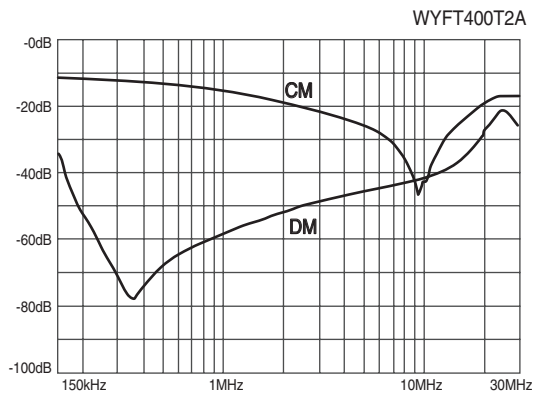

※ CM : Common mode, DM : Differential mode









30 250V Characteristics

● Characteristics

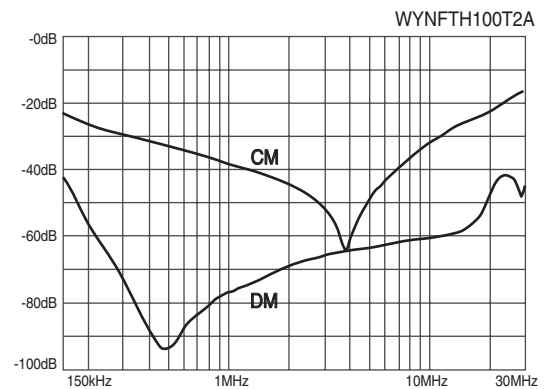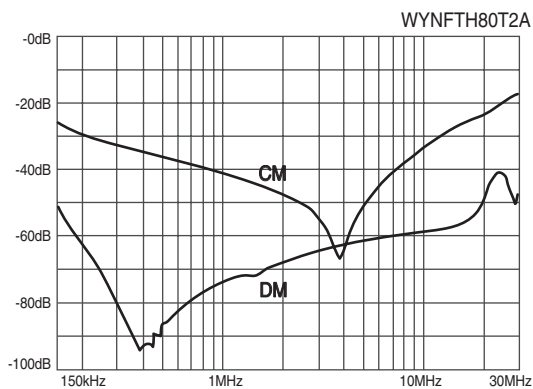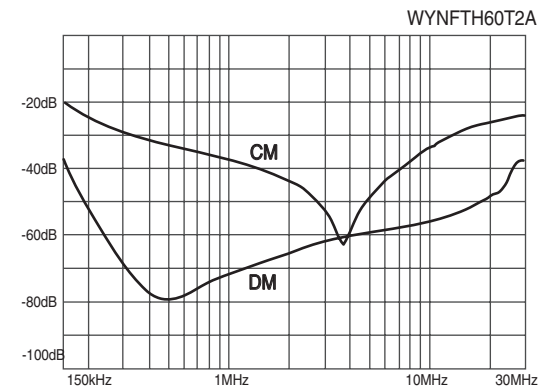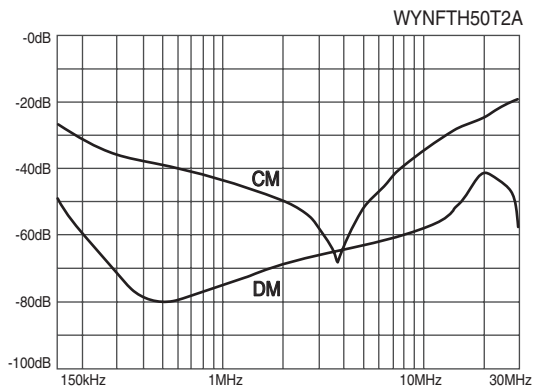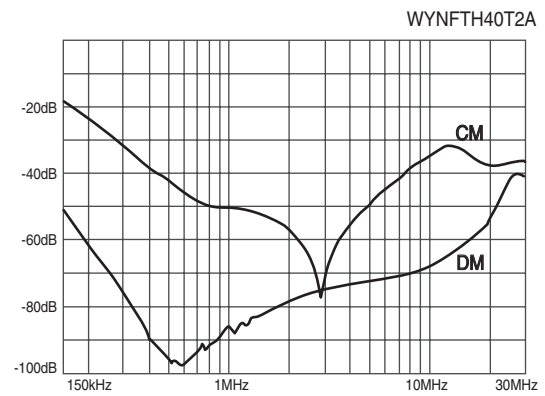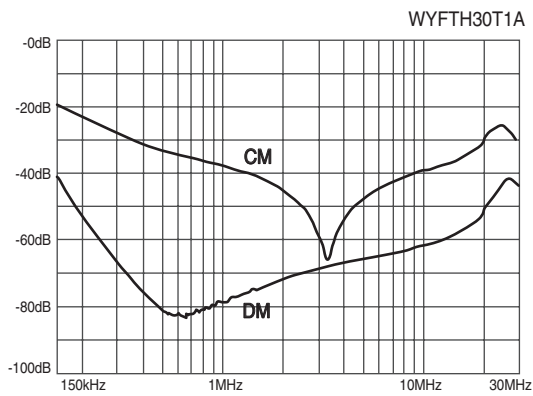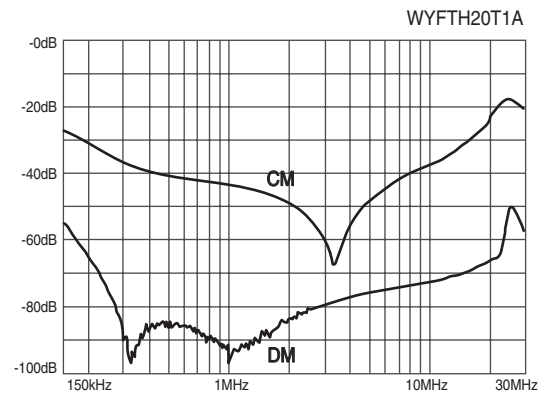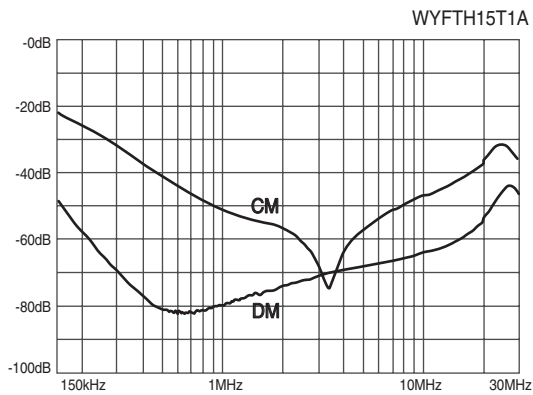









※ CM : Common mode, DM : Differential mode

● Characteristics

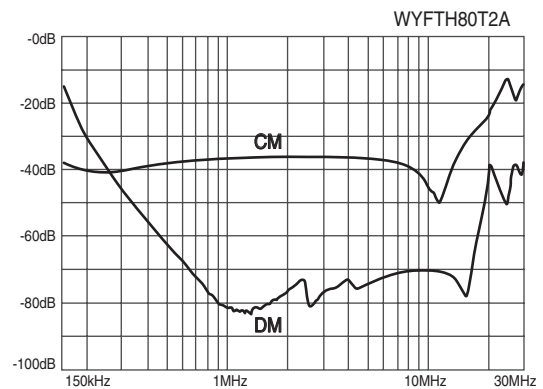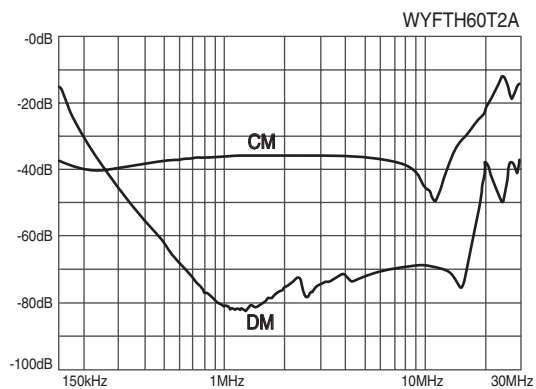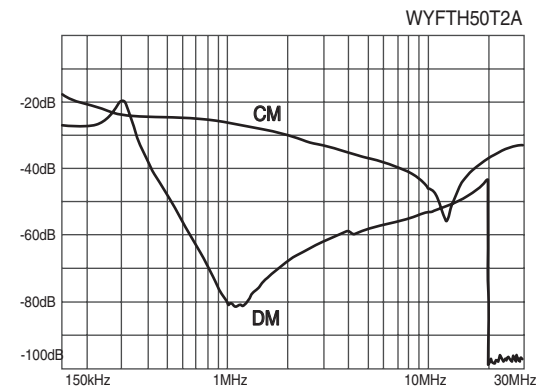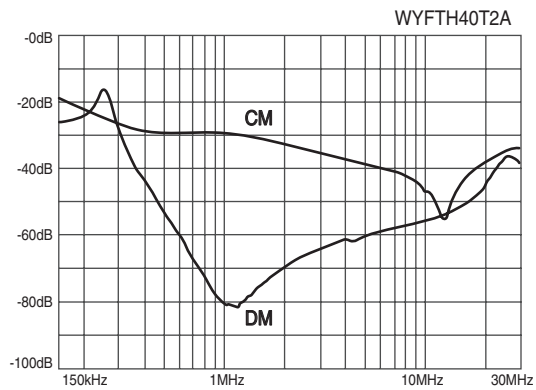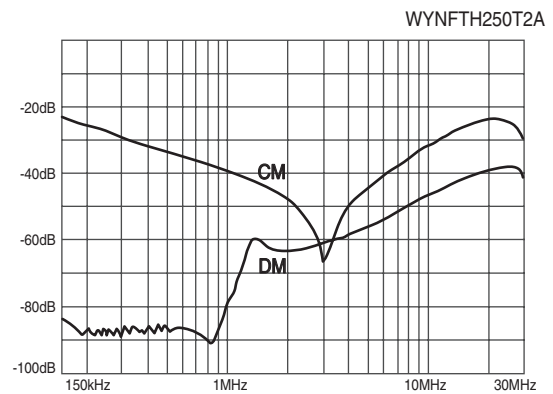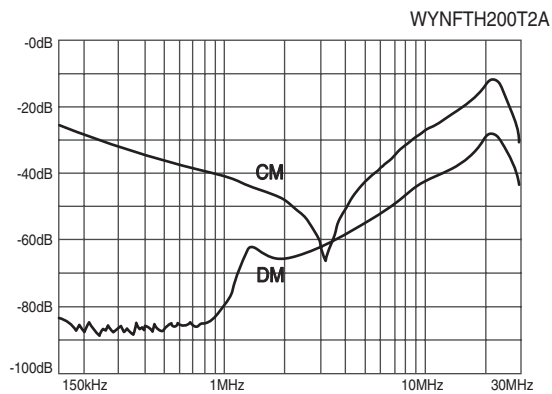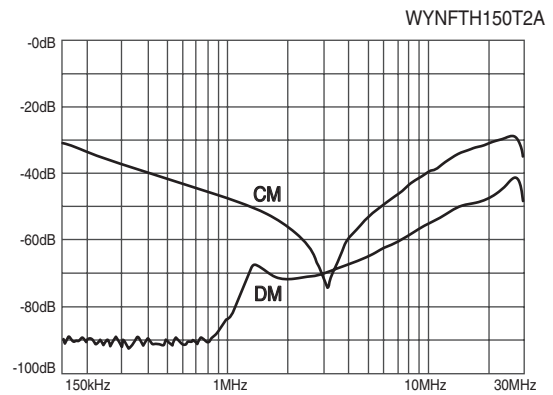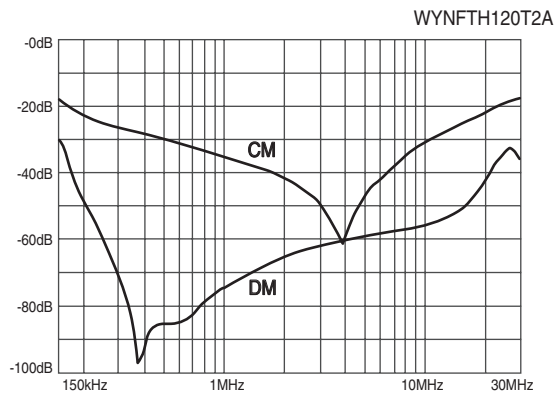


※ CM : Common mode, DM : Differential mode

● Characteristics

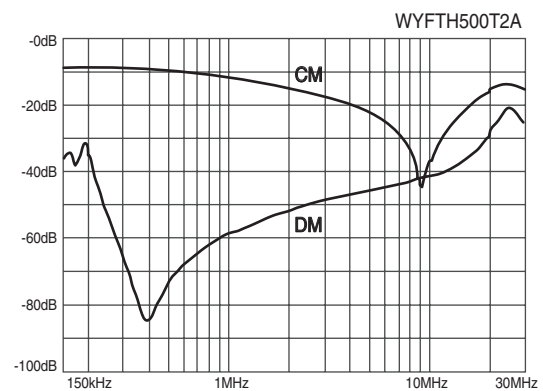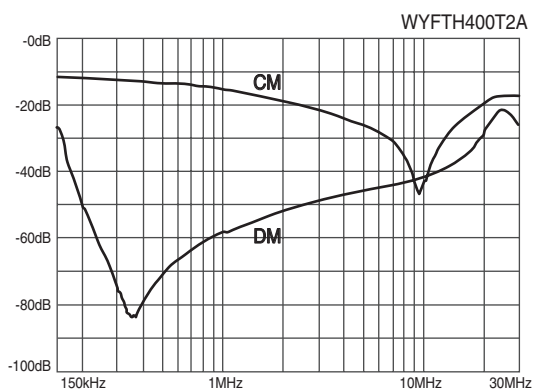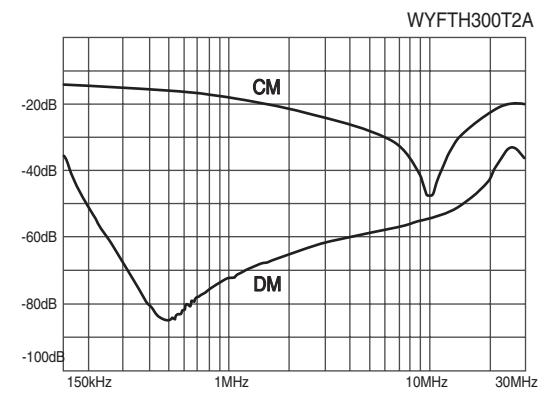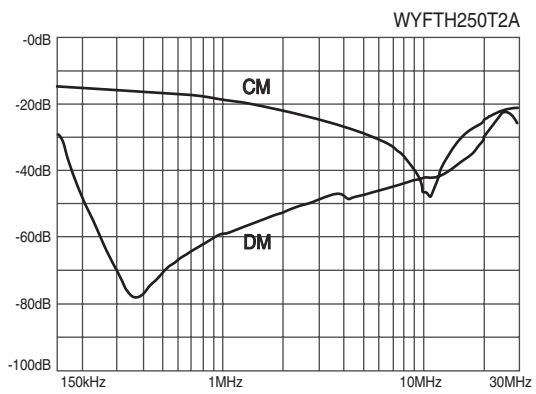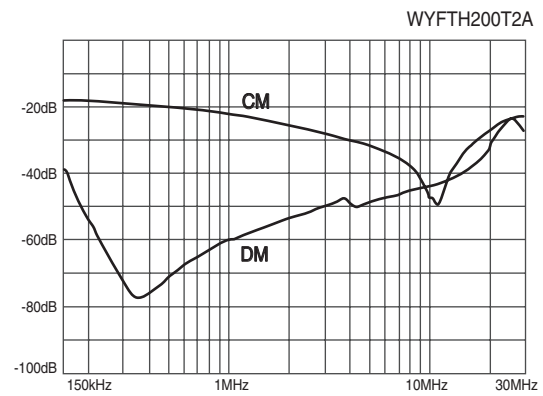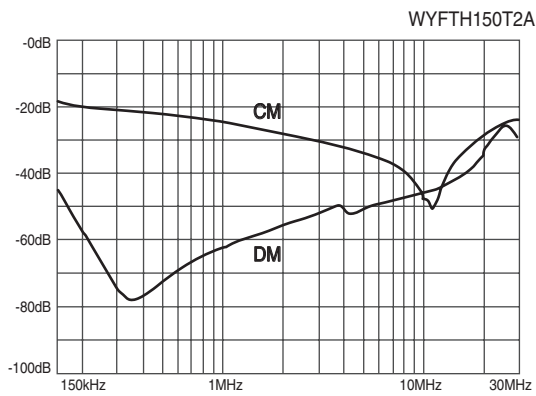
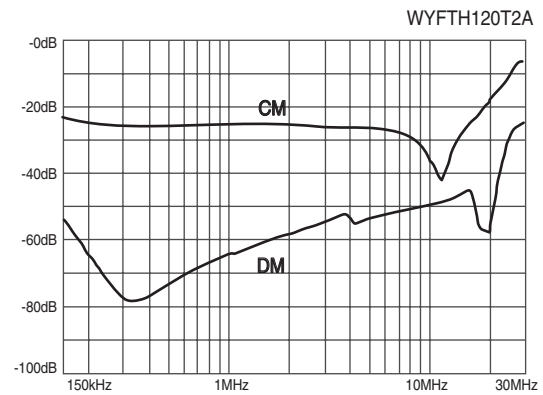
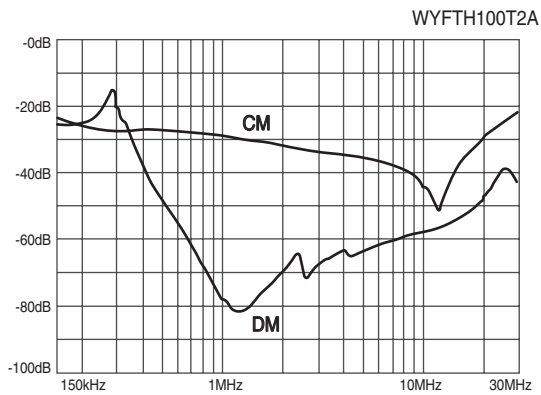


※ CM : Common mode, DM : Differential mode

● Characteristics

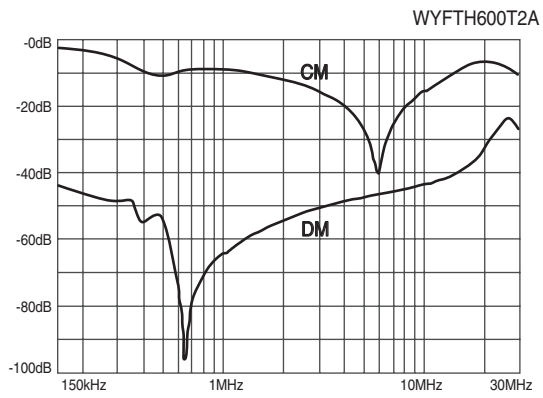

DM

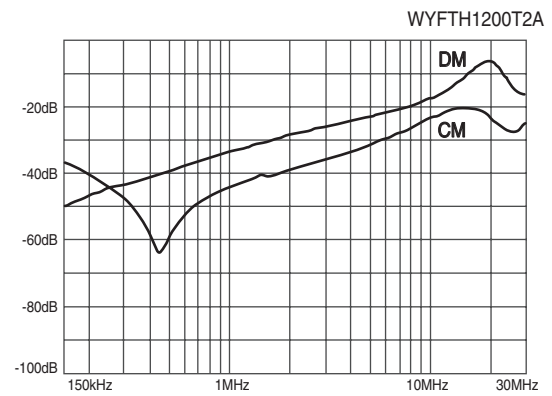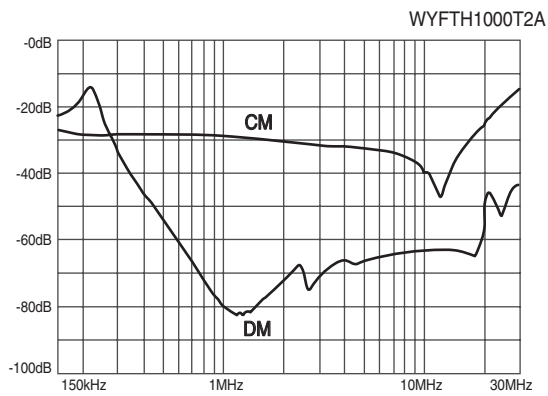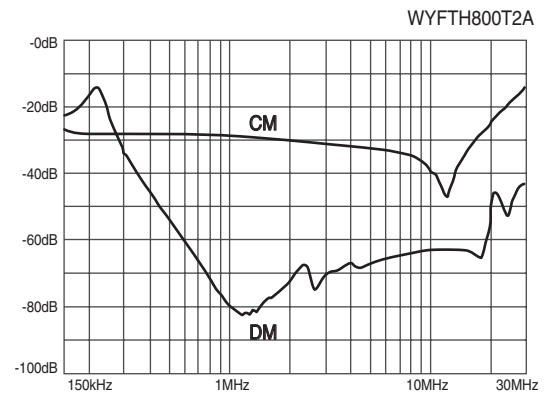

※ CM : Common mode, DM : Differential mode