


REACTOR

전원협조용 Input Reactor (AC 인버터 전단용 -입력용)


CE RoHS

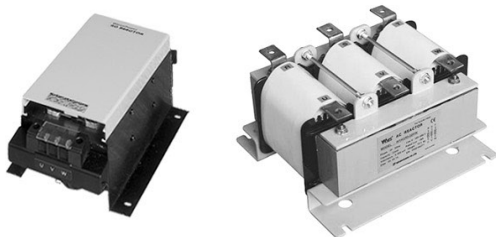

Specifications

- Rating : 3 ϕ 220V / 50/60 Hz
- Dielectric withstand : AC 3000V / 1min
- Insulation resistance : DC 500V / 100M Ω
- IP Class : IP20
- Sound level : Less than 65db
- Operating temp. : -20 $^{\circ}$ C ~ +40 $^{\circ}$ C

Circuit Diagram



220V (Impedance Voltage : 4.4Vac)


MODEL	용량(kW)	정격전류 (A)	인덕턴스 (mH)	Dimensions(mm)							Type	Weight (kg)
				W	D	H	W1	D1	ϕ E	ϕ F		
WYACR2-0.75	0.75	3.4	3.43	95.2	183	104.5	81.2	100	6	M4	A	2.3
WYACR2-1.5	1.5	7.5	1.56	95.2	183	104.5	81.2	100	6	M4	A	2.5
WYACR2-2.2	2.2	15	0.776	118	193.4	115.5	104	100	6	M4	A	4.8
WYACR2-3.7	3.7	20	0.584	118	193.4	115.5	104	100	6	M4	A	5.2
WYACR2-5.5	5.5	30	0.389	118	193.4	115.5	104	100	6	M4	A	6.5
WYACR2-7.5	7.5	40	0.292	134	330	104.5	120	217	6	M4	A	9.0

220V (Impedance Voltage : 4.4Vac)

MODEL	용량(kW)	정격전류 (A)	인덕턴스 (mH)	Dimensions(mm)							Type	Weight (kg)
				W	D	H	W1	D1	ϕ E	ϕ F		
WYACR2-11	11	60	0.195	194	189	151	160	171	11	7	B	11.6
WYACR2-15	15	76	0.154	194	189	151	160	171	11	7	B	13.1
WYACR2-18.5	18.5	100	0.117	232	219	146	200	201	11	7	B	16.8
WYACR2-22	22	116	0.101	232	219	146	200	201	11	9	B	17.7
WYACR2-30	30	134	0.0871	232	219	146	200	201	11	9	B	18.2
WYACR2-37	37	164	0.0712	232	219	146	200	201	11	9	B	30.7
WYACR2-45	45	200	0.0584	232	219	146	200	201	11	9	B	30.7
WYACR2-55	55	242	0.0482	256	249	165	200	235	11	11	B	31.8
WYACR2-75	75	334	0.0349	256	249	165	200	235	11	11	B	32.5
WYACR2-90	90	402	0.0290	256	249	205	200	235	11	11	B	48.5
WYACR2-110	110	490	0.0238	300	249	206	240	234	11	13	B	52.7
WYACR2-132	132	580	0.0201	300	249	206	240	234	11	13	B	54.1
WYACR2-160	160	714	0.0163	300	249	206	240	234	11	13	B	57.4

Dimension

A Type

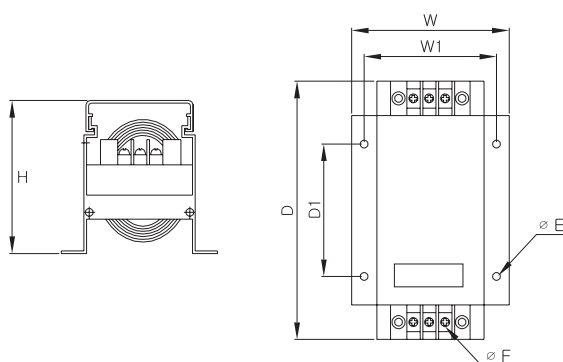

B Type

