


REACTOR

전원협조용 Input Reactor (AC 인버터 전단용 -입력용)


CE RoHS

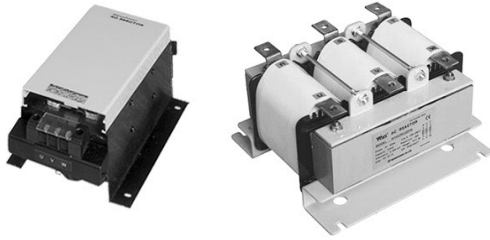

Specifications

- Rating : 3Ø 380/440V / 50/60 Hz
- Dielectric withstand : AC 3000V / 1min
- Insulation resistance : DC 500V / 100MΩ
- IP Class : IP20
- Sound level : Less than 65db
- Operating temp. : -20℃ ~ +40℃

Circuit Diagram




380V/440V (Impedance Voltage : 8.5Vac)

MODEL	용량(kW)	정격전류 (A)	인덕턴스 (mH)	Dimensions(mm)							Type	Weight (kg)
				W	D	H	W1	D1	ø E	ø F		
WYACR4-0.75	0.75	1.7	13.270	95.2	183	104.5	81.2	100	6	M4	A	2.3
WYACR4-1.5	1.5	3.4	6.635	95.2	183	104.5	81.2	100	6	M4		2.4
WYACR4-2.2	2.2	7.5	3.008	9.52	183	104.5	81.2	100	6	M4		2.5
WYACR4-3.7	3.7	10	2.256	118	193.4	115.5	104	100	6	M4		3.8
WYACR4-5.5	5.5	15	1.504	118	193.4	115.5	104	100	6	M4		4.6
WYACR4-7.5	7.5	20	1.128	118	193.4	115.5	104	100	6	M4		4.7
WYACR4-11	11	30	0.752	134	330	104.5	120	217	6	M4		8.3
WYACR4-15	15	38	0.594	134	330	104.5	120	217	6	M4		8.4
WYACR4-18.5	18.5	50	0.451	194	189	151	160	171	11	7	B	14
WYACR4-22	22	58	0.389	194	189	151	160	171	11	7		15
WYACR4-30	30	67	0.337	232	219	146	200	201	11	7		20
WYACR4-37	37	82	0.275	232	219	146	200	201	11	7		21
WYACR4-45	45	100	0.226	232	219	146	200	201	11	7		23
WYACR4-55	55	121	0.186	256	249	165	200	235	11	9		33
WYACR4-75	75	167	0.135	256	249	165	200	235	11	9		35
WYACR4-90	90	201	0.112	256	249	205	200	235	11	9		45
WYACR4-110	110	245	0.092	300	249	206	240	234	11	11		50
WYACR4-132	132	290	0.078	300	249	206	240	234	11	11		55
WYACR4-160	160	357	0.063	300	249	216	240	234	11	11		60
WYACR4-185	185	420	0.054	335	262	238	260	247	11	13		62
WYACR4-220	220	500	0.045	335	262	238	260	247	11	13		65
WYACR4-250	250	560	0.040	335	262	258	260	247	11	13		70
WYACR4-280	280	630	0.036	365	297	224	300	272	13	13		80
WYACR4-315	315	710	0.032	365	297	224	300	272	13	13		90
WYACR4-350	350	800	0.028	365	297	229	300	272	13	13		100
WYACR4-375	375	840	0.027	365	298	259	300	273	13	13		110

※220V용(WYACR2-□□)은 Size 및 형태가 변경될 수 있습니다. (May change size about 220V Type)

Dimension

A Type

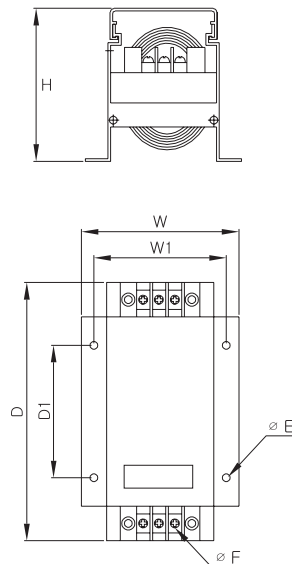

B Type

