

# NOISE FILTER

1Ø 250V 보급형 General Type



## UL 인증



### ● Features


- 2 Mounting Option
  - WYF\*\*\*\*D : Din Rail Mounting
  - WYF\*\*\*\* : Screw Mounting
- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant

### ● Specifications


ITEM	MODEL	SYMBOL	WYFS40T1A(D)	WYFS50T1A(D)
Rated Voltage		V	250	
Rated Current		A	40	50
Frequency		Hz	50 / 60	
Dielectric Withstand		V	1500VAC or 2250VDC for 1 minute(Line-Case)	
Insulation Resistance		MΩ	300	
Leakage Current		mA	0.8	
Operating Temperature		°C	-25°C ~ +100°C [Refer to Derating Curve TYPE-1]	
Operating Humidity		RH	35 ~ 85%RH	
Weight		kg	0.5	

※ Derating Curve of page 519


### ● Circuit Diagram

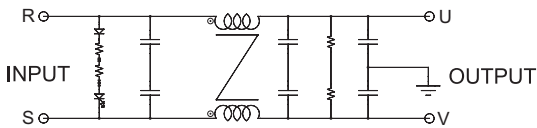

### ● Terminal



### ● Characteristics

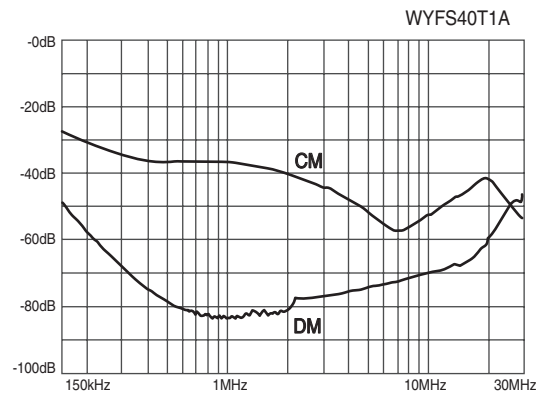

### ● Dimension

