


Surge Protective Device(SPD)




서지 낙뢰 보호기

단상접지 카운터형(1P2W) 380V, 440/480V Counter type 20/40kA series

CE RoHS

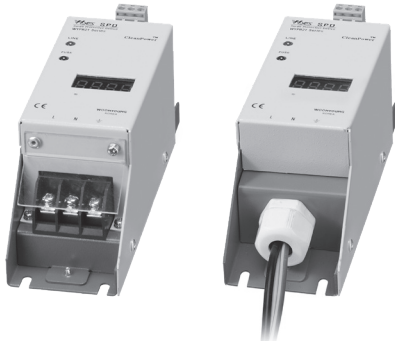

● Connection

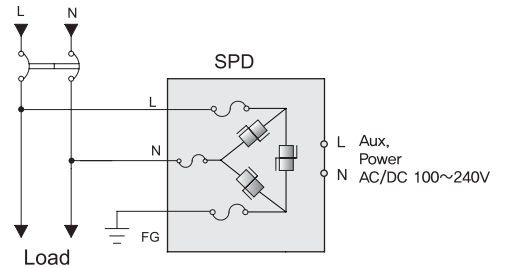

단상접지
(1phase earthed type)


● Specification

MODEL		WYPB2020T380C / L380C WYPB2020T440C / L440C	WYPB2040T380C / L380C WYPB2040T440C / L440C
ITEM			
Nominal voltage (Un)		Single phase 380VAC, 440 / 480VAC	
Aux, Power		AC / DC 100 ~ 240V	
Max. continuous operating voltage (Uc)		460 / 625VAC	
Voltage protection level (Up)		<1.2kV@20kV / 10kA (IEC61643-1)	
Rated frequency (Fo)		50 / 60Hz	
Max. discharge current (Imax)		20kA	40kA
Nominal discharge current (In)		10kA	20kA
Max. impulse current (Iimp)		-	
Protection level		Class II, III	
Protection mode		L-N, L-G, N-G	
Operating temperature range		-40 ~ 90°C	
Operating Humidity		35 ~ 85%RH	
Storage temperature range		-40 ~ 125°C	
Fuse		Thermal runaway fuse	
Connection type		T : Terminal type / L : Lead type	
Connection mode		Parallel connection type	
Wire size for connections		2.5mm ²	4mm ²
Response time		< 25 nano second	
Indicator LED	Green	Power lamp	
	Red	Fuse off at lamp on (이상시 램프'on')	
Weight (kg)		0.7	


*Model type T: Terminal Type, L: Lead wire Type

● Dimension

- PB type -

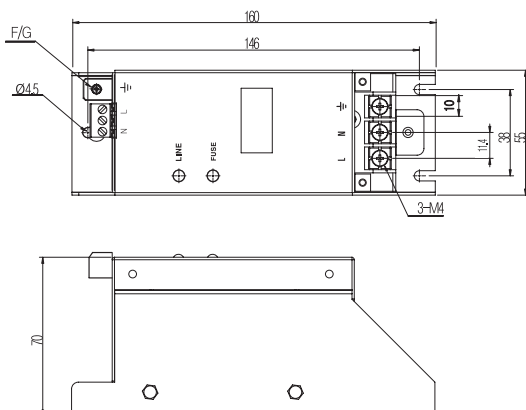


<Lead type>



20kA-KIV insulation wire 2.5mm²
40kA-KIV insulation wire 4mm²

Line	Color	Lead
L	White	60cm
N	Black	60cm
⊥	Green / Yellow	1m

● Terminal



Max 9, Min 4