


NOISE FILTER

1Ø 250V 고급형 High Quality Type

UL 인증

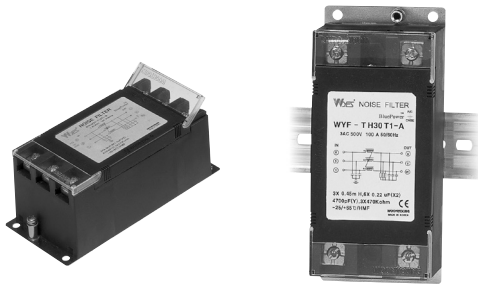

● Features


- 2 Mounting Option
 - WYF****D : Din Rail Mounting
 - WYF**** : Screw Mounting
- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant

● Specifications


ITEM	MODEL	SYMBOL	WYFS40T1B (D)	WYFS50T1B (D)
Rated Voltage	V		250	
Rated Current	A		40	50
Frequency	Hz		50 / 60	
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)	
Insulation Resistance	MΩ		500	
Leakage Current	mA		0.8	
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]	
Operating Humidity	RH		35 ~ 85%RH	
Weight	kg		0.5	

※ Derating Curve of page 519


● Circuit Diagram

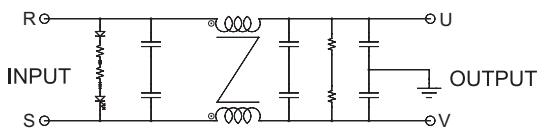



● Terminal



● Characteristics







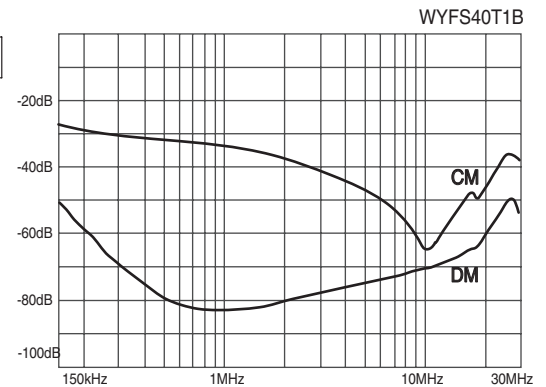


● Dimension

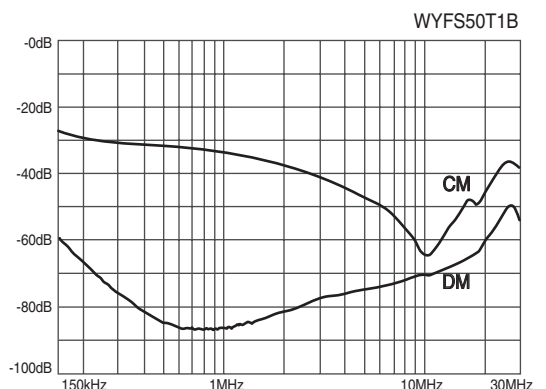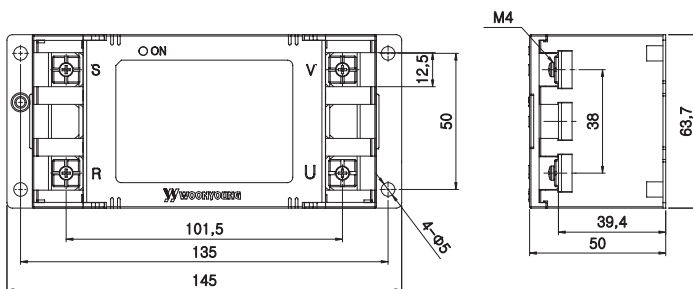

트랜스포머
REACTOR
리액터
무정전압 레이어
SSR
전력조정기
TPR
스위칭파워
SMP
노이즈 필터
N/F
하모닉 필터
H/F
서지보호기
SPD
보호계전기
RELAY
누전경보기
ELD = GFR
영상변류기
ZCT
판넬메타
METER
계기용변성기
CT = VT
선트랜스팬
SHUNT = FAN

● Characteristics

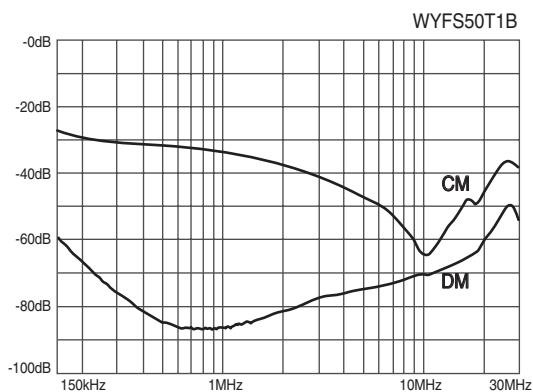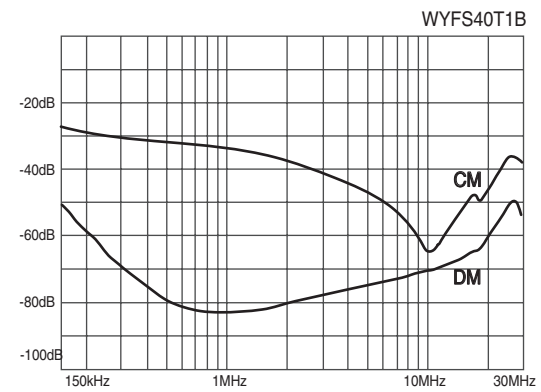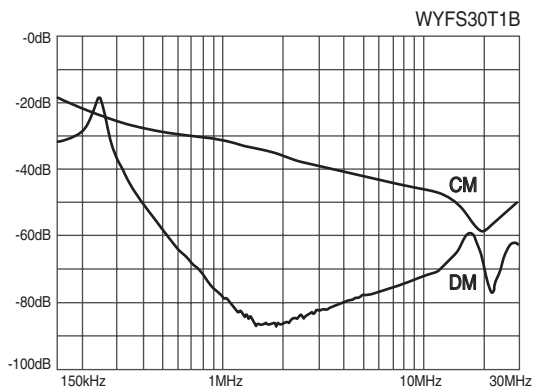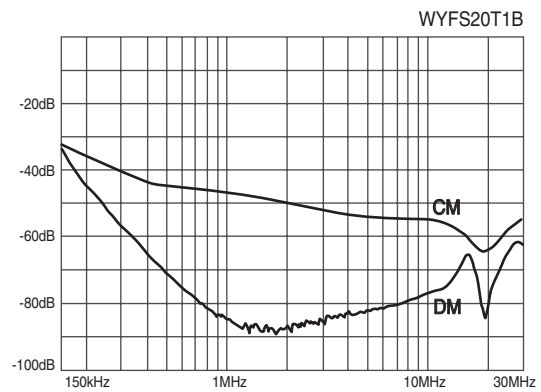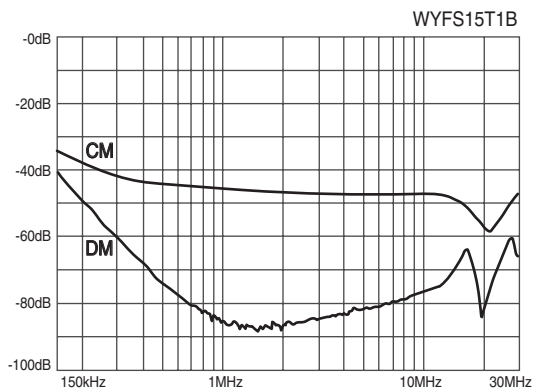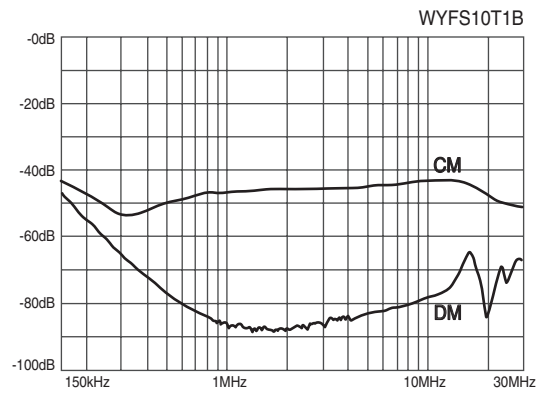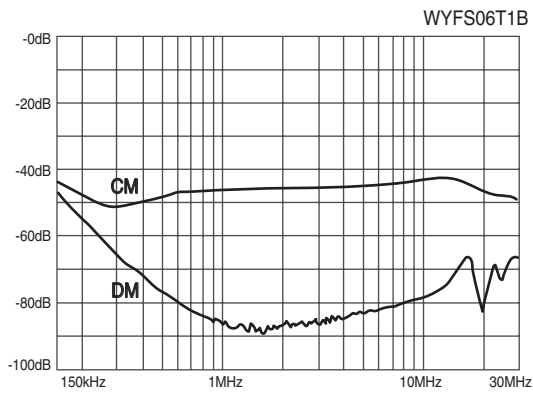

※ CM : Common mode, DM : Differential mode