



● Features

- Input Voltage Range (AC170~264V)
- Built-in Inrush Current Limiter
- Over Current Protection
- Short Circuit Protection
- Over Voltage Protection
- Over Temperature Protection
- Remote Sensing
- Remote Control

● Specifications

MODEL		WYSP-1000S05C	WYSP-1000S12C	WYSP-1000S24C	WYSP-1000S48C
ITEM					
INPUT	VOLTAGE	220VAC...16.0A (Full Load)			
	FREQUENCY	50/60Hz(47~440Hz or DC)			
	EFFICIENCY	75% typ	80% typ	80% typ	85% typ
	INRUSHCURRENT	220VAC...60A (I _o =100%, T _a =25°C at cold start)			
OUTPUT CIRCUIT	VOLTAGE (V)	5	12	24	48
	CURRENT (A)	200.0	83.4	41.7	20.9
	REGULATION LINE (mV)	25Max	60Max	120Max	240Max
	REGULATION LOAD (mV)	50Max	120Max	240Max	480Max
	RIPPLE (mVp-p)	50Max	120Max	240Max	480Max
	RIPPLE NOISE (mVp-p)	100Max	170Max	290Max	530Max
	TEMPERATURE DRIFT 0 ~ 50°C (mV)	50Max	120Max	240Max	480Max
	RISE TIME (mS)	200Max (AC IN 180V I _o =100%)			
	HOLDING TIME (mS)	10typ (AC IN 180V I _o =100%)			
PROTECTION CIRCUIT	OVER CURRENT PROTECTION	Works at over 110% of rating and recovers automatically			
	OVER VOLTAGE PROTECTION	Works at 115~140% of rating			
ELECTRICALLY ISOLATED	INPUT-OUTPUT	AC 1,500V 1minute, DC 500V 100MΩ (At room temperature & Humidity)			
	INPUT-CASE.FG	AC 1,500V 1minute, DC 500V 100MΩ (At room temperature & Humidity)			
	OUTPUT-CASE	AC 500V 1minute, DC 500V 100MΩ (At room temperature & Humidity)			
ENVIRONMENT	OPERATING TEMP.AND HUMID	0 ~ +50°C, 20 ~ 90% RH (Non Condensing)			
	STORAGE TEMP. AND HUMID	-20 ~ +75°C, 20 ~ 90% RH (Non Condensing)			
GENERAL	COOLING	Fan cooling			
	FUNCTION	V.Sensor, Remote Control, Fan			
	WEIGHT (kg)	5.1			


SWITCHING MODE POWER SUPPLY

SP Series 1000W


WYES
스위칭전원장치

CE RoHS


Derating Curve For Ambient

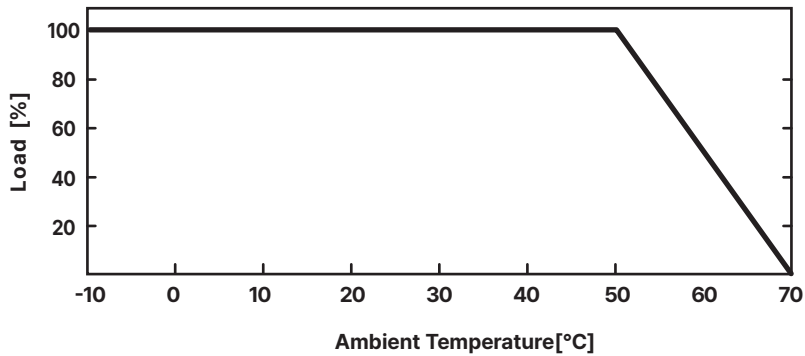

Derating Curve For Input Voltage

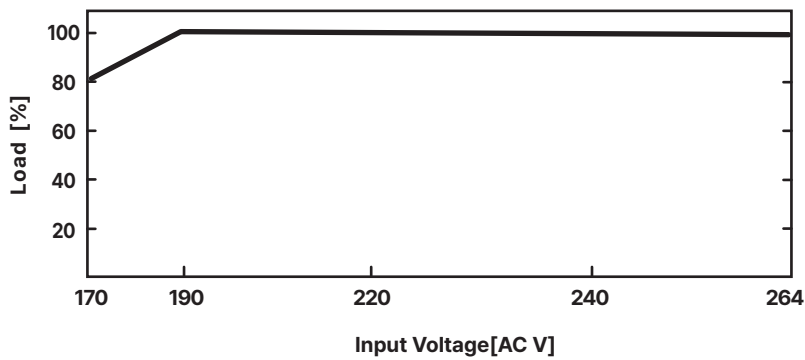

Dimension

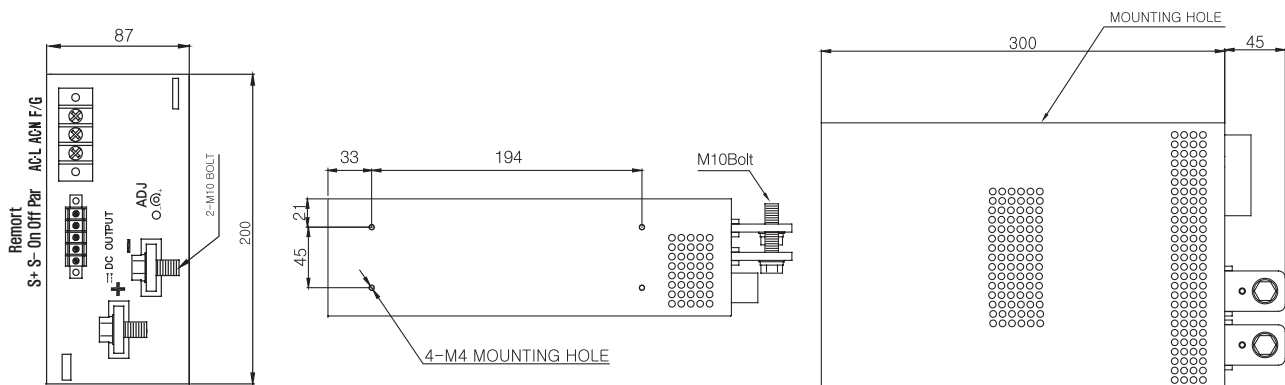

트랜스포머
REACTOR
리액터
무전압블레이
SSR
전력조정기
TPR
스위칭파워
SMPS
노이즈필터
N/F
하모닉필터
H/F
서지보호기
SPD
보호계전기
RELAY
누전경보기
ELD=GFR
영상변류기
ZCT
판넬메타
METER
계기용변성기
CT=VT
선편환
SHUNT=FAN