



● Features


- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant
- Inverter Output Type : Model Type"C"
(WYFT40T2C)

● Specifications


ITEM	MODEL	SYMBOL	WYFT40T2A WYFT40T2C	WYFT50T2A WYFT50T2C	WYFT60T2A WYFT60T2C	WYFT80T2A WYFT80T2C	WYFT100T2A WYFT100T2C	WYFT120T2A WYFT120T2C	WYFT150T2A WYFT150T2C	WYFT200T2A WYFT200T2C	WYFT250T2A WYFT250T2C
Rated Voltage	V		250								
Rated Current	A		40	50	60	80	100	120	150	200	250
Frequency	Hz		50 / 60								
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)								
Insulation Resistance	MΩ		500								
Leakage Current	mA		9								
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE - 2]								
Operating Humidity	RH		35 ~ 85%RH								
Weight	kg		1.0		2.5		4.5		5.0		

※ Derating Curve of page 519

● Circuit Diagram

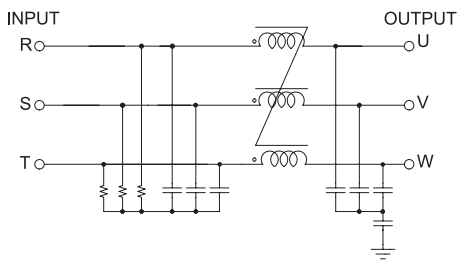


● Terminal



Max 10, Min 4(40~50A)
Max 14, Min 6(60~100A)
Max 22, Min 8(120~150A)
Max 25, Min 8(200~250A)

● Dimension

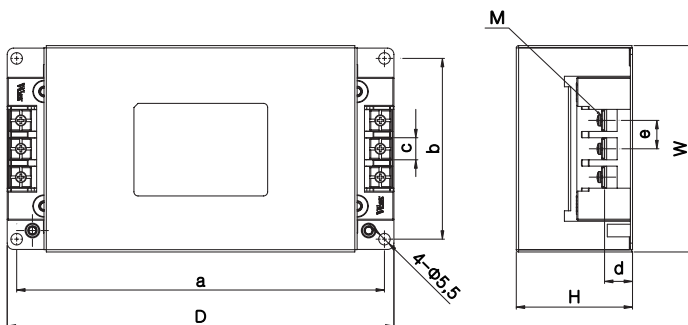

MODEL	W	H	D	a	b	c	d	e	M
WYFT40 ~ 50T2A	98	55	184	175	86	10.5	13	13.5	M4
WYFT60 ~ 100T2A	116	75	234	219	98	15	18	27.5	M6
WYFT120 ~ 150T2A	170	80	300	282	145	23	20	35	M8
WYFT200 ~ 250T2A	170	90	312	282	145	26	23	38.5	M8

● Characteristics

