


UL TYPE TRANSFORMER

WY11-UL Series WT Type


UL 인증

단상 복권형으로 일반 전원 공급용 제품이며 전 규격을 **UL** **CE** 인증 받아 신뢰성과 안전성을 동시에 확보한 제품입니다.

The product, which is a single phase isolation transformer general electric source, has been **UL** **CE** certified for its proven reliability and safety.

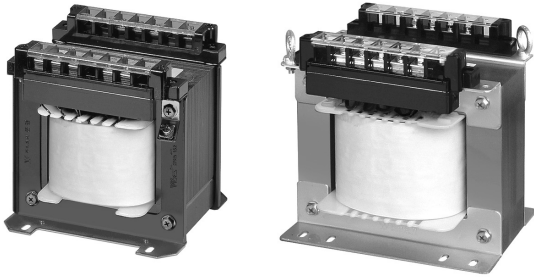

• Circuit Diagram

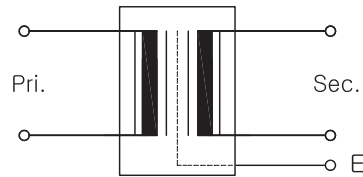

● Standard & Approval


- UL 5085-1/2
- UL 1059(Terminal Block)
- IEC 61558
- UL Cer. No : E349195

● Specifications


MODEL NO.	TYPE	SPECIFICATIONS		VA	DIMENSIONS (mm)										WEIGHT (kg)
		PRI.(V)	SEC.(V)		W	H	D	a	b	c	d	e	Ø	M	
WY11-100UL	WT	①100 ②110 ③115 ④120	①100 ②110 ③115 ④120	100	98.4	105.9	113	72	92	98.4	113	7	6 x 12	3.5	3.23
WY11-200UL				200	120	121.5	114	84	95	120	114	10	5.5 x 10	4	4.95
WY11-300UL				300	140	136.5	126.2	97.9	106	140	126.2	10	6 x 12	4	7.25
WY11-500UL				500	160.2	161.1	146	114	124	160.2	146	10	6 x 13	4	10.70
WY11-750UL				750	160.2	161.1	156	114	134	160.2	156	10	6 x 13	4	12.30
WY11-1KUL				1K	184	188	150	133.8	122	184	150	10	7 x 14	4	16.65
WY11-1.5KUL				1.5K	184	188	170	133.8	142	184	170	16	7 x 14	6	20.75
WY11-2KUL				2K	219	226	169	180	135	219	172	16	7 x 15	6	26.80
WY11-2.5KUL				2.5K	243	247	192	180	165	243	192	16	9 x 19	6	39.00
WY11-3KUL				3K	243	247	192	180	165	243	192	16	9 x 19	6	40.20
WY11-5KUL				5K	270	269	200	180	170	270	200	16	9 x 19	6	54.00

※ 1차, 2차 전압은 주문시 선택

● Dimension

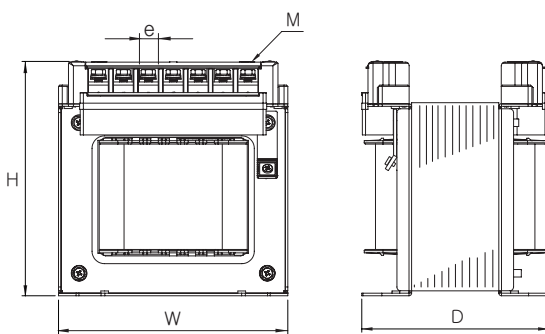

● Terminal



100VA : Max 6, Min 3.5
200VA~1kVA : Max 9, Min 4
1.5~5kVA : Max 15, Min 6
7.5kVA : Max 23, Min 6
10kVA : Max 25, Min 6