


# UL TYPE TRANSFORMER

WY3P22D-UL Series(500UL~15KUL) WT Type




## UL 인증



삼상 복권형으로 일반 전원 공급용 제품이며 전 규격을 인증 받아 신뢰성과 안전성을 동시에 확보한 제품입니다.

The product, which is a three phase isolation transformer general electric source, has been certified for its proven reliability and safety.

### •Circuit Diagram



### ● Standard & Approval


- UL 5085-1/2
- UL 1059(Terminal Block)
- IEC 61558
- UL Cer. No : E349195

### ● Specifications


| MODEL NO.      | TYPE | SPECIFICATIONS                            |                                            | VA   | DIMENSIONS (mm) |       |     |       |     |    |             |           |      |    | WEIGHT (kg) |
|----------------|------|-------------------------------------------|--------------------------------------------|------|-----------------|-------|-----|-------|-----|----|-------------|-----------|------|----|-------------|
|                |      | PRI.(V)                                   | SEC.(V)                                    |      | W               | H     | D   | a     | b   | c  | Ø           | E(Shield) | E(⊥) | M  |             |
| WY3P22D-500UL  | WT   | △<br>①200<br>②208<br>③220<br>④230<br>⑤240 | △N<br>①200<br>②208<br>③220<br>④230<br>⑤240 | 500  | 190             | 172   | 134 | 99    | 130 | 12 | 6.6 x 16    | M4        | M4   | M4 | 13.00       |
| WY3P22D-1KUL   |      |                                           |                                            | 1k   | 235             | 210   | 144 | 113.5 | 120 | 12 | 7 x 14.5    | M4        | M4   | M4 | 18.60       |
| WY3P22D-1.5KUL |      |                                           |                                            | 1.5k | 275             | 248   | 165 | 130   | 120 | 16 | 9 x 19      | M6        | M4   | M6 | 20.00       |
| WY3P22D-2KUL   |      |                                           |                                            | 2k   | 275             | 248   | 165 | 130   | 120 | 16 | 9 x 19      | M6        | M4   | M6 | 30.50       |
| WY3P22D-3KUL   |      |                                           |                                            | 3k   | 332             | 292   | 190 | 160   | 180 | 16 | 10.5 x 20.5 | M6        | M4   | M6 | 45.40       |
| WY3P22D-5KUL   |      |                                           |                                            | 5k   | 332             | 292   | 190 | 185   | 180 | 16 | 10.5 x 20.5 | M6        | M4   | M6 | 58.30       |
| WY3P22D-6KUL   |      |                                           |                                            | 6k   | 332             | 292   | 190 | 185   | 180 | 16 | 10.5 x 20.5 | M6        | M4   | M6 | 73.00       |
| WY3P22D-7.5KUL |      |                                           |                                            | 7.5k | 375             | 319.5 | 236 | 180   | 208 | 16 | 12 x 20     | M6        | M4   | M6 | 81.70       |
| WY3P22D-10KUL  |      |                                           |                                            | 10k  | 390             | 339   | 236 | 208   | 180 | 20 | 12 x 20     | M6        | M4   | M6 | 92.00       |
| WY3P22D-15KUL  |      |                                           |                                            | 15k  | 425             | 368   | 260 | 196   | 205 | 20 | 14 x 40     | M6        | M4   | M6 | 101.50      |

※ 1차, 2차 전압은 주문시 선택

### ● Dimension

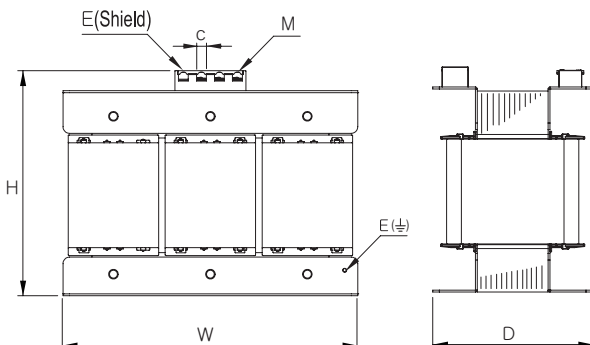

### ● Terminal



500VA~1kVA : Max 12.6, Min 4  
1.5kVA~7.5kVA : Max 17.2, Min 6  
10kVA~15kVA : Max 18.2, Min 6