



● Features


- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- RoHS Compliant

● Specifications


ITEM	MODEL	SYMBOL	WYNFT40T2B	WYNFT50T2B
Rated Voltage	V		250	
Rated Current	A		40A	50A
Frequency	Hz		50 / 60	
Dielectric Withstand	V		2500VAC for 1 minute (Line-Case)	
Insulation Resistance	MΩ		DC 100MΩ at the 500Vdc	
Leakage Current	mA		≤4.5mA at the 250Vac	
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-2]	
Operating Humidity	RH		35 ~ 85%RH	
Weight	kg		1.2	

※ Derating Curve of page 519

● Circuit Diagram

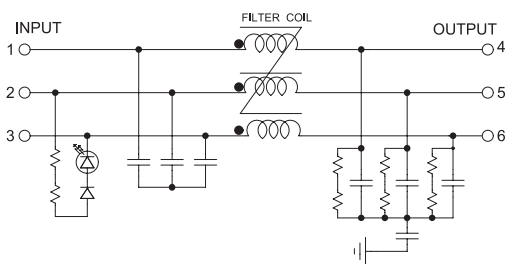


● Terminal



Max 16, Min 6 (40~50A)

● Characteristics

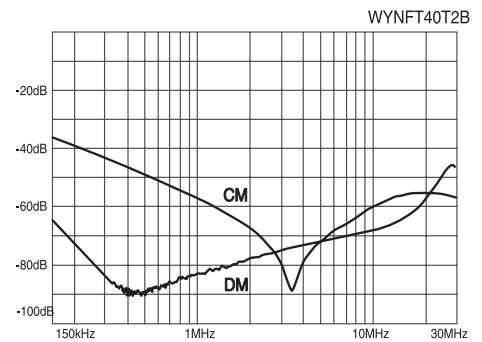

● Dimension

