


WY3P-W Series (삼상복권)

CE RoHS

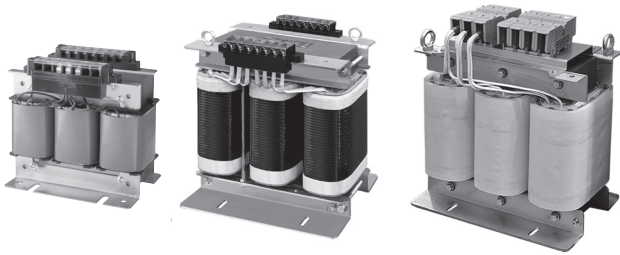

* 위 제품은 1차, 2차 단일 TAP 기준 제작시
이미지입니다. 다수 TAP 적용시 형상이 변경될수
있습니다.(터미널 블록 고정식 단자대 적용)

삼상 복권형으로 입력 AC 380V.440V 에 Y결선, 출력 AC220V에 Δ 결선형으로 제작
하였으며, 소형부터 대형까지 전문화된 제품으로 단자대(Terminal Block)등으로 제작
하였으며 전 모델에 대하여 **CE**를 획득하여 소비자의 선택의 폭을 다양화 하였으며
절연방식은 B종이며 F, H 종은 주문에 의해 제작합니다.

This transformer is three phase isolation transformer and input voltage
is AC380V, 440V Y connection, output voltage is AC220V delta
connection. it has terminal block system and Insulation class is B.
also acquired **CE** certification all model from small to large capacity.
insulation class F and H is available order made.

·100VA~5KVA Insulation Class B
·7.5KVA~400KVA Insulation Class H


Specifications

MODEL NO.	TYPE	SPECIFICATIONS		VA	DIMENSIONS (mm)									WEIGHT (kg)	
		PRI.(V)	SEC.(V)		W	H	D	b	d	e	Ø2	M			Type
												Pri.	Sec.		
• 3P 380V · 440V Line → 220V Line Double Winding Series (복권형)															
WY3P－100W	W3PT			100	140	127	87	103	45	10	5.5 x 10	M4	M4	A	2.6
WY3P－200W				200	140	130	100	103	60	10	5.5 x 15	M4	M4		5.0
WY3P－300W				300	155	145	108	104	90	10	5.5 x 15	M4	M4		6.0
WY3P－500W				500	190	180	105	130	90	10	5 x 15	M4	M4		8.0
WY3P－1KW				1K	195	180	126	130	109	10	5 x 15	M4	M4		13.0
WY3P－1.5KW				1.5K	240	210	145	120	115	10	10 x 20	M4	M4		18.6
WY3P－2KW				2K	240	210	145	120	115	10	10 x 20	M4	M4		20.0
WY3P－3KW				3K	275	250	175	120	130	10	10 x 20	M4	M4		30.5
WY3P－5KW	5K	330	290	190	180	160	10	10 x 20	M4	M4	45.0				
WY3P－7.5KW	W3PT			7.5K	330	290	215	180	185	10	10 x 20	M4	M4	A	59.0
WY3P－10KW				10K	375	319.5	236	180	216	16	12 x 20	M4	M4		73.5
WY3P－15KW				15K	390	342	236	180	216	16	12 x 20	M6	M6		92.0
WY3P－20KW				20K	422	372	260	205	196	16	14 x 40	M6	M6	B	101.5
WY3P－30KW				30K	435	484	270	225	212	20	11 x 40	M6	M6		139.0
WY3P－40KW				40K	480	543	276	240	206	－	13 x 27	M6	M8		175.0
WY3P－50KW				50K	483	543	296	240	226	－	13 x 27	M6	M8		192.0
WY3P－75KW				75K	545	590	306	340	236	－	13 x 27	M8	M10		272.0
WY3P－100KW	100K	590	610	350	420	280	－	13 x 27	M8	M10	336.0				
WY3P－120KW	W3PT			120K	620	640	530	500	275	－	13 x 27	－	－	－	500.0
WY3P－150KW				150K	690	690	600	500	275	－	16x26	－	－	－	600.0
WY3P－200KW				200K	750	750	650	500	295	－	13 x 27	－	－	－	750.0
WY3P－250KW				250K	820	790	700	500	295	－	13 x 27	－	－	－	900.0
WY3P－300KW				300K	820	790	700	500	295	－	13 x 27	－	－	－	950.0
WY3P－350KW				350K	870	950	750	500	315	－	13 x 27	－	－	－	1,300.0
WY3P－400KW				400K	910	1000	800	500	315	－	13 x 27	－	－	－	1,400.0

※ 3KVA 이상 "I" Bolt 부착 (Attach an "I" bolt for 3KVA or larger)


※ 120KVA ~ 400KVA, 50Hz 주문시 외형 사이즈가 상이할 수 있으니 본사로 문의 바랍니다.

Circuit Diagram




Dimension

· A Type

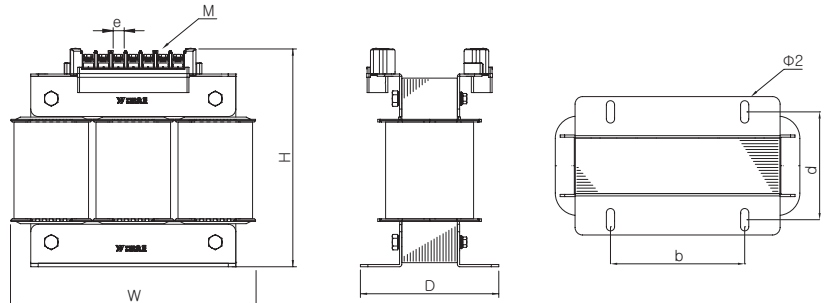

Terminal



100VA ~ 10kVA	Max 9, Min 4
15 ~ 30kVA	Max 15, Min 6
40 ~ 100kVA	M6 Max 23, Min 6
	M8 Max 28, Min 8
	M10 Max 39, Min 10
150kVA	Max 19, Min 8

· B Type

