1Ø 케이블형 노이즈 컷 트랜스포머

CE RoHS

Specifications

- Input voltage : AC220V
- Output voltage : AC220V
- Frequency : 50/60 Hz
- Capacity : 300VA ~ 5kVA
- Insulation resistance : 100MΩ이상 / DC500V
- Dieletric withstand : AC3000V / 1min
- Oper. temperature : 0 ~ 50℃
- Oper. humidity : 30 ~ 95%

300VA~5kVA Lead Wire Type

MODEL	VA	DIMENSIONS (mm)						L1(m)	L2(m)	Cable(mm²)	WEIGHT (kg)
		W	H	D	a	b	Ø				
WYNC22-300L	300	120	139	165	100	100	7 x 10	1.5	1.5	2.5	7.9
WYNC22-500L	500	144	163	200	120	120	7 x 10				13
WYNC22-1KL	1K	171	192	210	140	133	8 x 12				20
WYNC22-1.5KL	1.5K	203	229	200	170	124	7 x 10				28
WYNC22-2KL	2K	203	229	200	170	124	7 x 10				35
WYNC22-3KL	3K	203	229	231	170	141	7 x 10			6	40
WYNC22-5KL	5K	220	258	275	180	175	9 x 15				54

※기타 : 주문에의함.(Option)

제품 주요 용도(Major applications)

- 반도체 제조 장비의 전원 공급용
- 정밀 계측기의 전원 공급용
- 의료기,철도,전산센터등의 주전원 공급용
- 교통망 신호 제어등의 전원 Line
- 노이즈 발생이 심한 전원 Line
- MICOM 제어기기, PLC, OA, FA 기기의 전원 공급용

- Supply power to the semiconductor manufacturing equipment.
- Supply power to precision meters
- Supply main power to medical devices, railroads and computer centers
- Power supply line for transportation network signal control.
- Power supply line producing high level of noise.
- Supply power to Micom controls and PLC, OA and FA equipment.

Connection Diagram

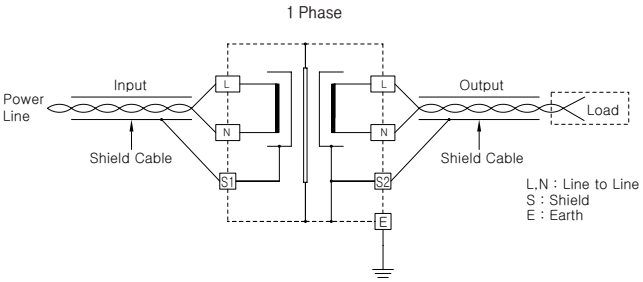

Dimension







0.25 ~ 1kVA







1.5 ~ 5kVA