


Surge Protective Device(SPD)


WYES®
서지 낙뢰 보호기

단상접지 일반형(1P2W) 220, 380, 440V General type 10~70kA series

CRHS

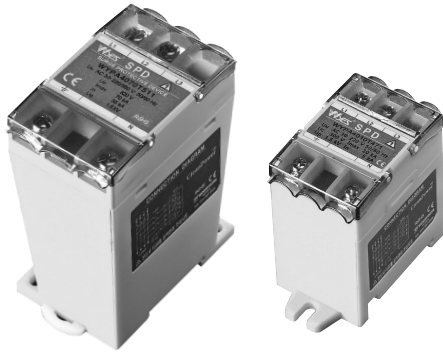

● Connection




단상접지
(1phase earthed type)


● Specification

MODEL	ITEM	Nominal voltage (Un)	Max. continuous operating voltage (Uc)	Max. discharge current (Imax)	Nominal discharge current (In)	Voltage protction level (Up)	Dimension	Weight (kg)
WYPA2010T220		AC220V	AC300V	10kA	5kA	<1.5kV	A	0.1
WYPA2010T380		AC380V	AC510V					
WYPA2010T440		AC440V	AC625V					
WYPA2015T220		AC220V	AC275V	15kA	7.5kA			0.2
WYPA2015T380		AC380V	AC510V					
WYPA2015T440		AC440V	AC625V					
WYPA2025T220		AC220V	AC275V	25kA	12.5kA		B	0.3
WYPA2025T380		AC380V	AC510V					
WYPA2025T440		AC440V	AC625V					
WYPA2040T220		AC220V	AC275V	40kA	20kA			0.4
WYPA2040T380		AC380V	AC510V					
WYPA2040T440		AC440V	AC625V					
WYPA2070T220		AC220V	AC320V	70kA	35kA			0.5
WYPA2070T380		AC380V	AC510V					
WYPA2070T440		AC440V	AC625V					

● Dimension

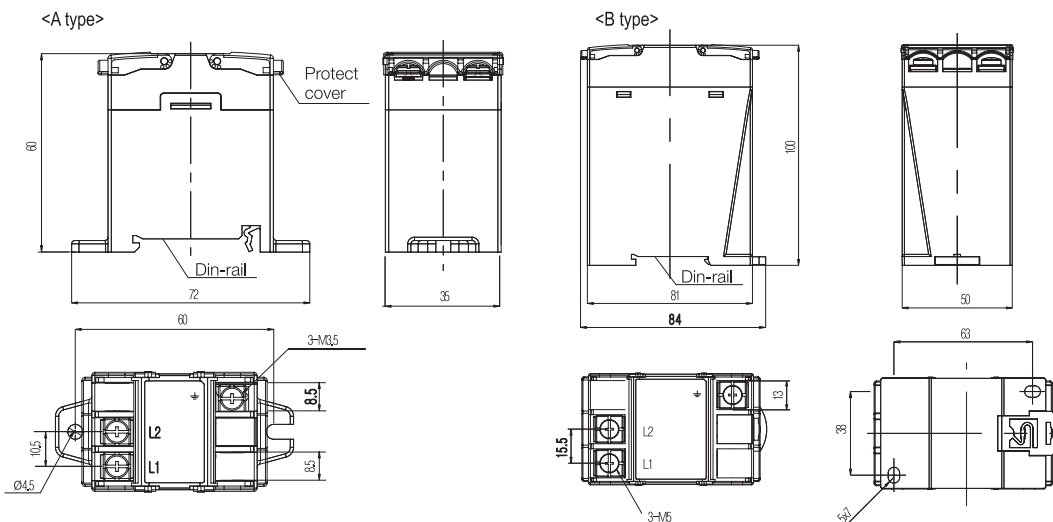

● Terminal



A Type : Max 8, Min 3.5
B Type : Max 13, Min 5

트랜스포머
TRANS= NCT
리액터
REACTOR
무전압 릴레이
SSR
전력조정기
TPR
스위칭파워
SMP S
노이즈 필터
N/F
하모닉 필터
H/F
서지보호기
SPD
보호계전기
RELAY
누전경보기
ELD= GFR
영상변류기
ZCT
판넬메타
METER
계기용변성기
CT= VT
선풍팬
SHUNT= FAN