


Surge Protective Device (SPD)

단상 일반형(1P2W) 110, 220, 380, 440V General type 2~70kA series

CE RoHS




● Connection




● Specification

MODEL	ITEM	Nominal voltage (Un)	Max. continuous operating voltage (Uc)	Max. discharge current (Imax)	Nominal discharge current (In)	Voltage protction level (Up)	Dimension	Weight (kg)
WYPA1002T012		DC12V	DC14V	2kA	1kA	<28V	A	0.04
WYPA1003T024		DC24V	DC45V	3kA	1.5kA	<64V		
WYPA1010T110		AC110V	AC130V	10kA	5kA	<1.5kV		
WYPA1010T220		AC220V	AC300V					
WYPA1010T380		AC380V	AC510V					
WYPA1010T440		AC440V	AC625V					
WYPA1015T110		AC110V	AC130V	15kA	7.5kA			
WYPA1015T220		AC220V	AC300V					
WYPA1015T380		AC380V	AC510V					
WYPA1015T440		AC440V	AC625V					
WYPA1025T110		AC110V	AC130V	25kA	12.5kA			
WYPA1025T220		AC220V	AC300V					
WYPA1025T380		AC380V	AC510V					
WYPA1025T440		AC440V	AC625V					
WYPA1040T110		AC110V	AC130V	40kA	20kA			
WYPA1040T220		AC220V	AC300V					
WYPA1040T380		AC380V	AC510V					
WYPA1040T440		AC440V	AC625V					
WYPA1070T110		AC110V	AC130V	70kA	35kA	B	0.07	
WYPA1070T220		AC220V	AC300V					
WYPA1070T380		AC380V	AC510V					
WYPA1070T440		AC440V	AC625V					

● Dimension

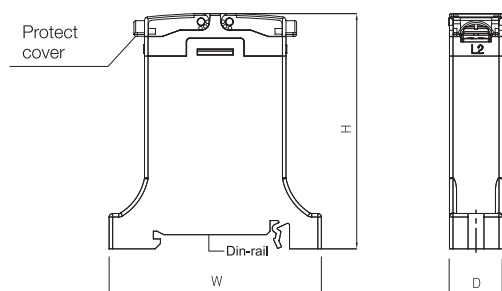

● Terminal

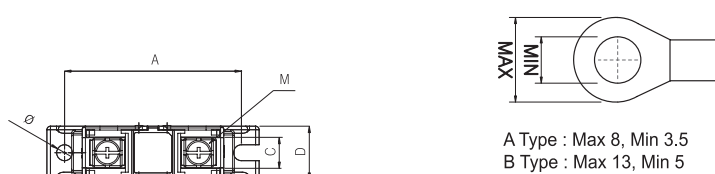

TYPE	W	D	H	A	C	M	Ø
A	60	15	66.5	50	8.5	3.5	4.5
B	90	20	91.5	75	13	5	5.5