


Surge Protective Device(SPD)

삼상접지 일반형(3P3W) 220, 380, 440V General type 10~70kA series




RoHS




● Specification

MODEL	ITEM	Nominal voltage (Un)	Max. continuous operating voltage (Uc)	Max. discharge current (Imax)	Nominal discharge current (In)	Voltage protection level (Up)	Dimension	Weight (kg)
WYPA3010T220		AC220V	AC300V	10kA	5kA	<1.5kV	A	0.3
WYPA3010T380		AC380V	AC510V					
WYPA3010T440		AC440V	AC625V					
WYPA3015T220		AC220V	AC275V	15kA	7.5kA			
WYPA3015T380		AC380V	AC510V					
WYPA3015T440		AC440V	AC625V					
WYPA3025T220		AC220V	AC275V	25kA	12.5kA		B	0.4
WYPA3025T380		AC380V	AC510V					
WYPA3025T440		AC440V	AC625V					
WYPA3040T220		AC220V	AC275V	40kA	20kA			0.5
WYPA3040T380		AC380V	AC510V					
WYPA3040T440		AC440V	AC625V					
WYPA3070T220		AC220V	AC320V	70kA	35kA		0.6	
WYPA3070T380		AC380V	AC510V					
WYPA3070T440		AC440V	AC625V					

● Dimension

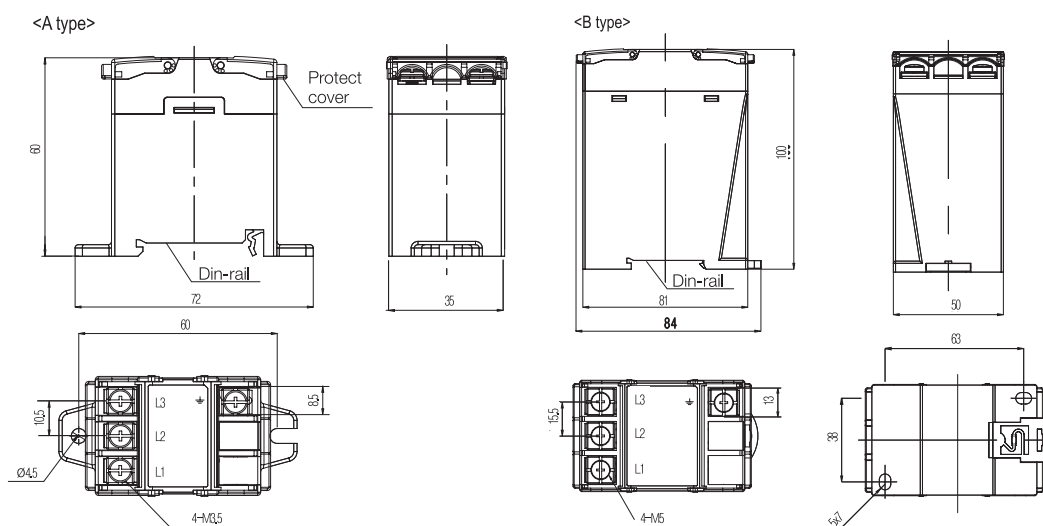

● Terminal



A Type : Max 8, Min 3.5
B Type : Max 13, Min 5